


Coaxial Isolator, 5.8-7.1GHz SMA Connectors, 10 Watts RADI-5.8-7.1-S3-10WR

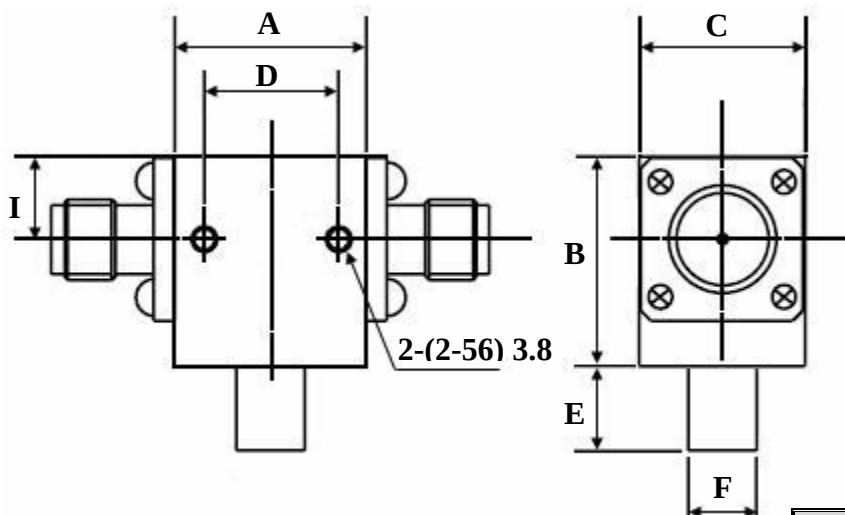

Direction of RF:	
R	Default 
L	

Units: mm
Not to scale

Order Examples: RADI-5.8-7.1-S3-10WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	I	
1	22.35	22.35	18.5	15.875	5.0	7.0	6.48	mm
								mm

Size#	Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Op. Temp °C	
1	5.8-7.1	0.4	20	1.20	10	10	-10 to +70	