


Coaxial Circulator, 350-450MHz N-Type Connector, 200 Watts RADC-350-450M-N23-200WR

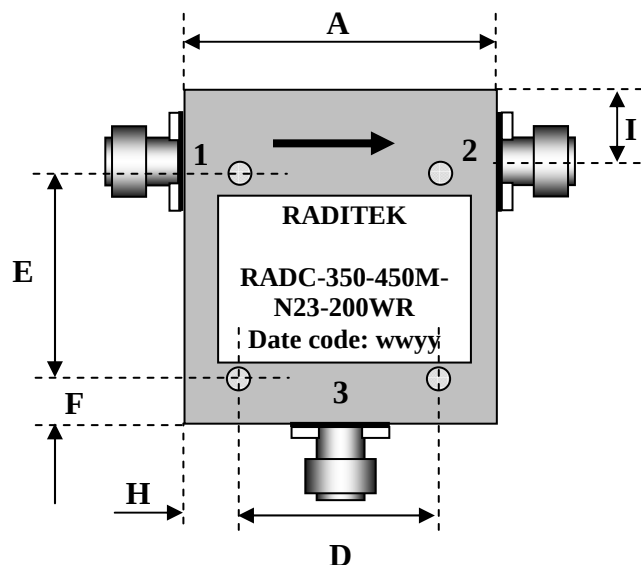

Tolerance (unless otherwise stated):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

Direction of RF:	
R	Default 
L	

Units: mm
Not to scale

Order Examples: RAD**C**-F1-F2M-NX-25WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	77	77	25	tba	tba	tba	tba	tba	tba	mm
										mm

Size#	Specifications: Frequency MHz	BW	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Op. Temp °C	Connector
1	350-450	25%	0.5	18	1.30	200	200	-10 to +70	N-Type