


Coaxial Circulator, 350-500MHz SMA Connector, 100 Watts RADC-350-500M-N23-100WR

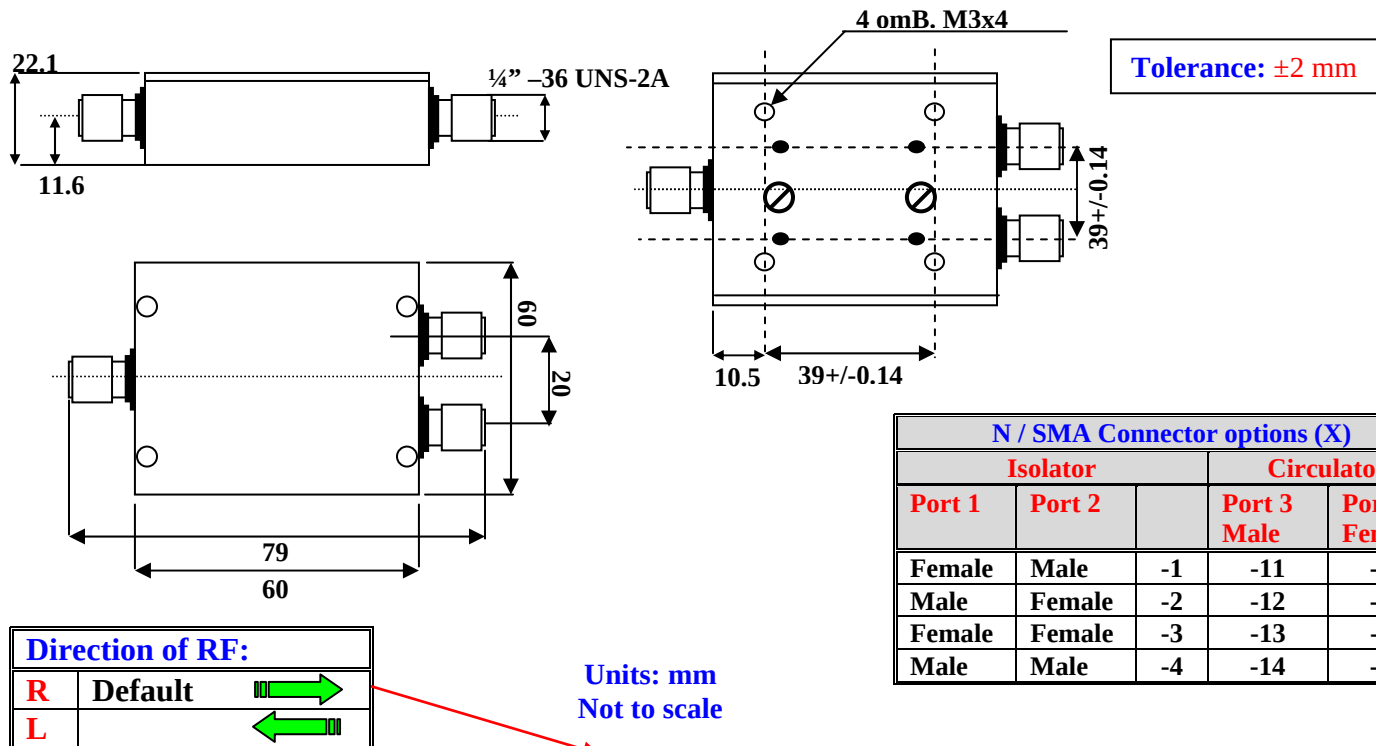

Order Examples: RAD**C**-350-500M-S23-100**WR**
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Op. Temp °C	Connector
350-500	0.5	17	1.50	100	100	-10 to +50	SMA
350-500	1.0	15	1.60	100	100	Room	SMA