
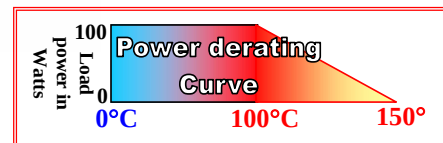
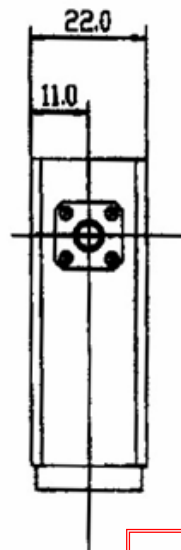


Coaxial Isolator, 328-336MHz SMA Connectors, 10 Watts (100 Watts Forward) RADI-328-336M-S3-10WR(100W)

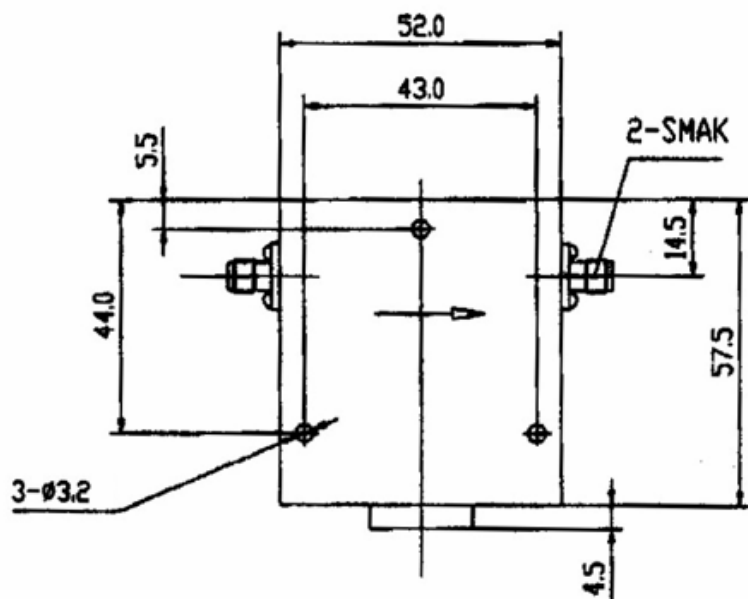

Direction of RF:	
R	Default
L	

Units: mm
Not to scale

Order Examples: RADI-328-336M-S3-10WR(100W)
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
328-336	0.3	25	1.20	100	10	-10 to +75	SMA