



Coaxial Isolator, 336-355MHz, Split Bands N-Type Connector, 100 Watts

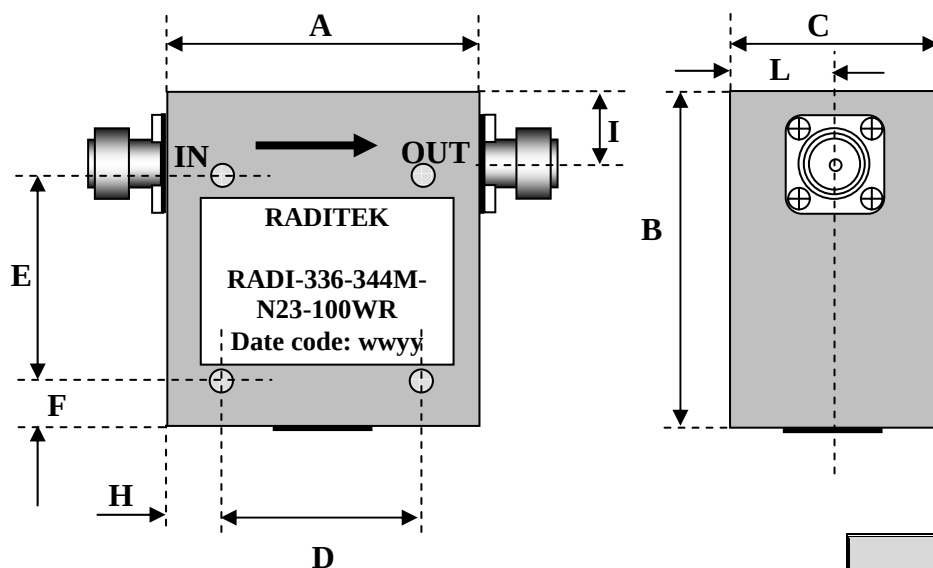

Tolerance (unless otherwise stated):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

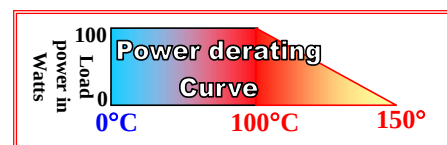

Direction of RF:		
R	Default	→
L		←

Units: mm
Not to scale

☞ Order Examples: RADI-336-344M-N23-100WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	70	77	32	tba	tba	tba	tba	tba	tba	mm
										mm

Size#	Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Op. Temp °C	Connector
1	336-344	0.3	23	1.15	100	100	-10 to +65	N-Type
1	345-355	0.3	23	1.15	100	100	-10 to +65	N-Type