
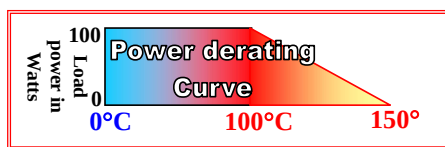


Coaxial Isolator, 380-420MHz, N-Type Connector, 200 Watts RADI-380-420M-N3-200WR(Circulator + Load)

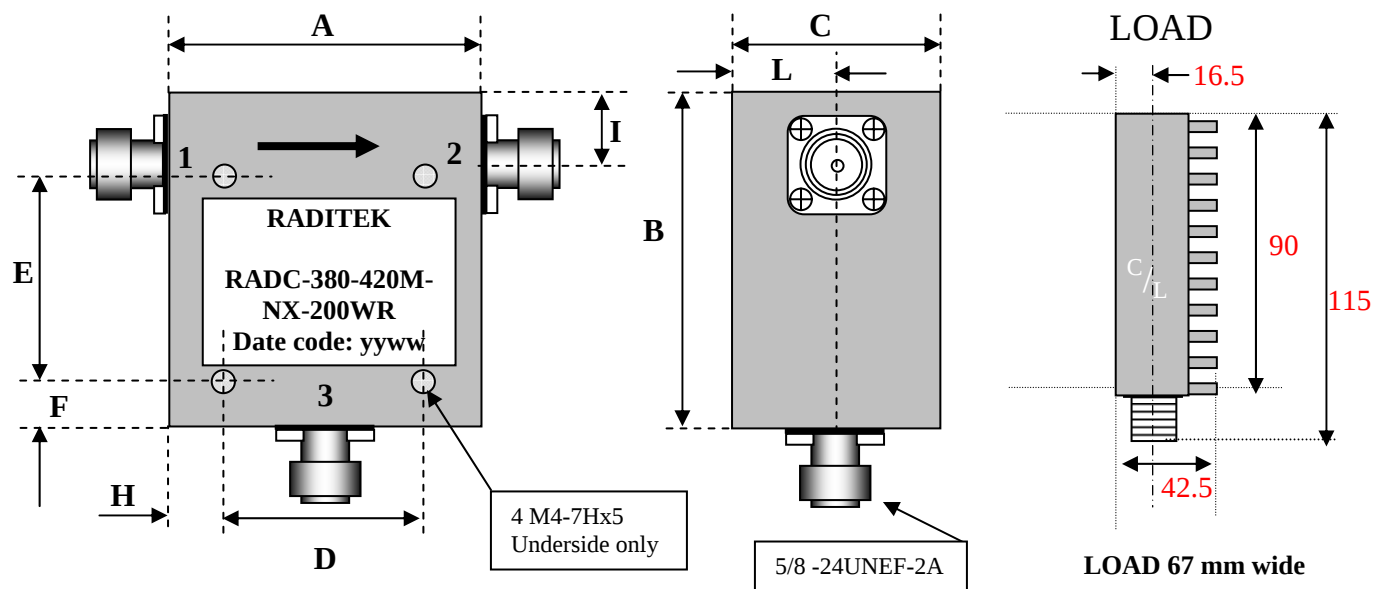

Tolerance: ± 2 mm

Direction of RF:		
R	Default	
L		

Units: mm
Not to scale

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Order Examples: RADI-380-420M-N3-200WR
I=ISOLATOR / C=CIRCULATOR

A	B	C	D	E	F	H	I	L	
64.8	73.4	25.5	50 $\pm$ 0.11	50 $\pm$ 0.11	10.4	tba	19.5	13	mm
									mm

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Op Temp °C	Storage Temp °C	Connector
380-420	0.5	20	1.30	300	200	-30 to +75	-40 to 110	N-Type

Altitude to 15,000 ft

Humidity 98% non-condensing %RH