
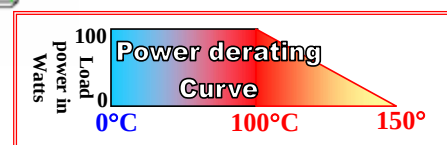


Coaxial Circulator, 400-470MHz BNC & N Connectors, 70 Watts RADC-400-470M-BNCf/BNCf/Nf-70WR

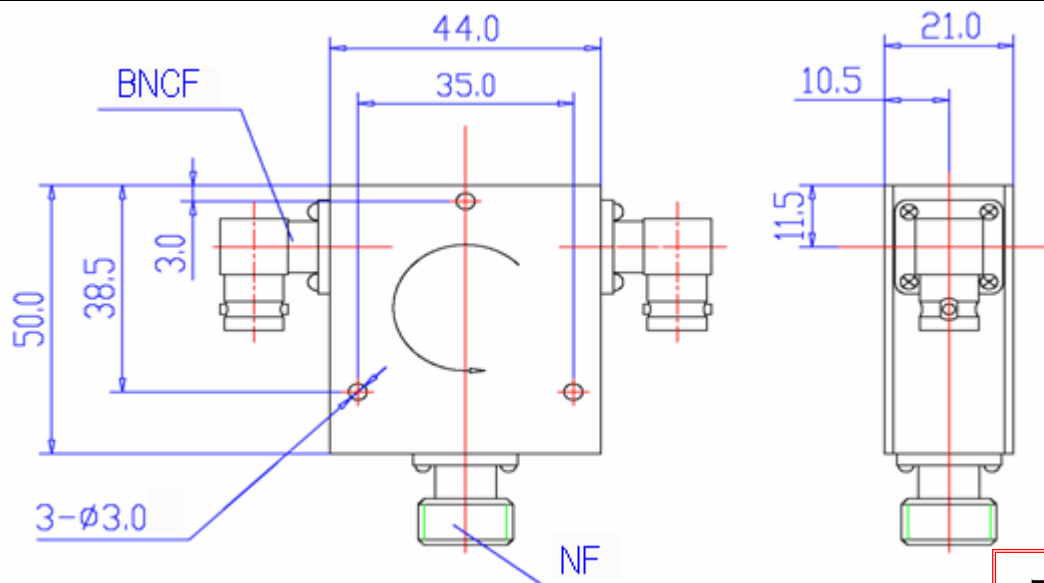

Direction of RF:	
R	Default 
L	

Units: mm
Not to scale

Order Examples: RADC-400-470M- BNCf/BNCf/Nf-70WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
400-470	0.4	20	1.22	70	70	-10 to +75	BNC-N