
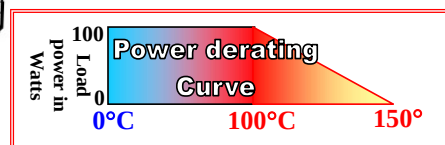
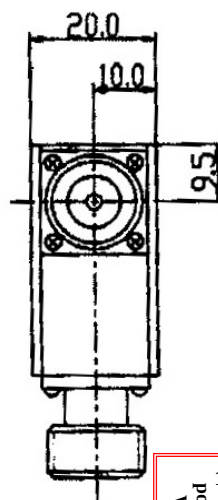


Coaxial Circulator, 495-516MHz N-Type Connectors, 100 Watts RADC-495-516M-N23-100WR

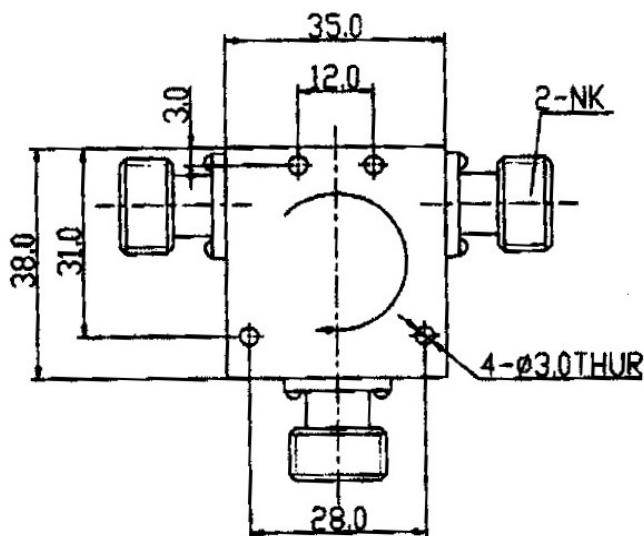

Direction of RF:	
R	Default 
L	

Units: mm
Not to scale

Order Examples: RADC-495-516M-N23-100WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
495-516	0.4	23	1.20	100	100	-10 to +75	N-Type