
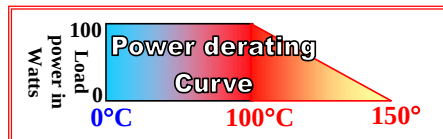


Coaxial Isolator or Circulator, 400-650MHz

SMA Connector, 5 Watt Isolator or 100 Watt Circulator

RADI-400-650M-S3-5WR

RADC-400-650M-S23-100WR

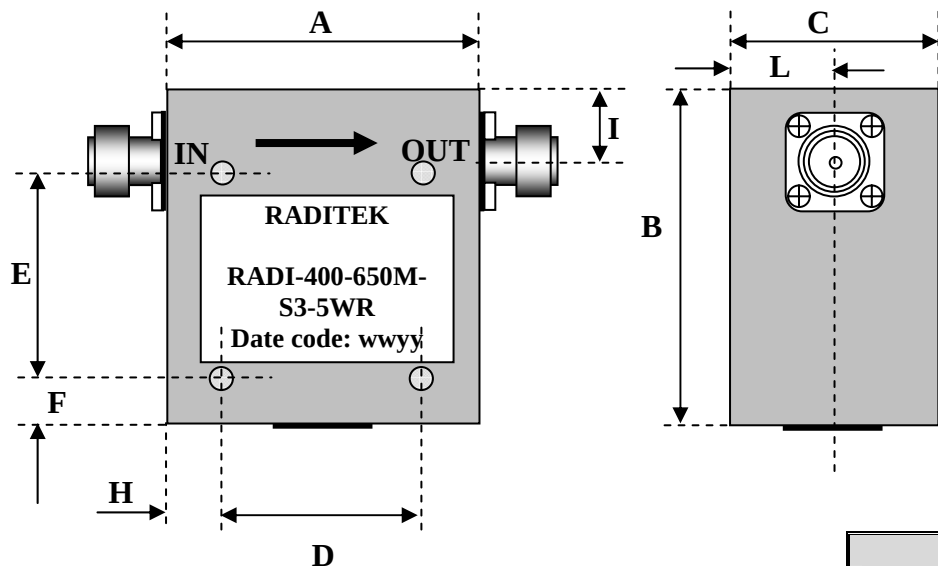

Direction of RF:		
R	Default	
L		

Units: mm
Not to scale

Order Examples: RADI-400-650M-S3-5WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	64.8	75.4	25.5	50	50	13	tba	19.5	tba	mm
										mm

Size#	Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
1- Isol	400-650	0.8 1.2	14 12	1.60 1.70	5	5	+25 -60 to +85	SMA
1- Circ	400-650	0.8 1.2	14 12	1.60 1.70	100	100	+25 -60 to +85	SMA