
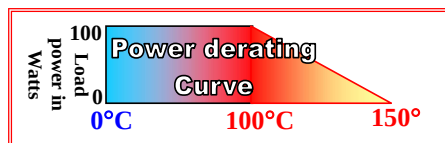


Coaxial Isolator, 400-570MHz SMA Connector, 50 Watts RADI-400-570M-S3-50WR

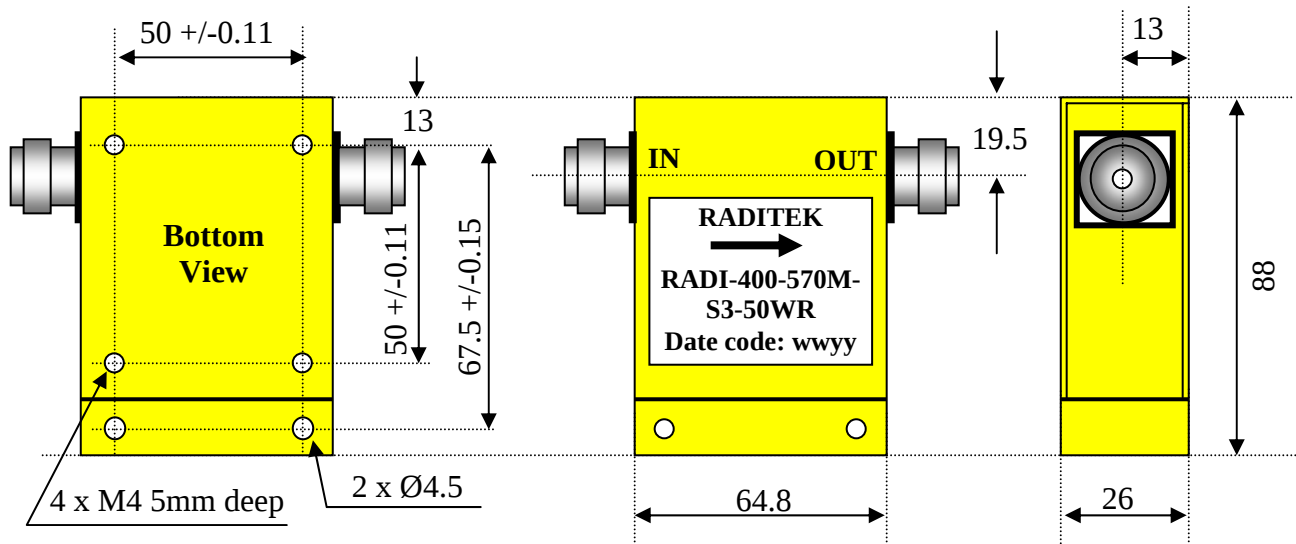

Direction of RF:	
R	Default 
L	

Units: mm
Not to scale

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Order Examples: RADI-400-570M-S3-50WR
I=ISOLATOR / C=CIRCULATOR

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
400-570	0.5	17	1.35	50	50	-40 to +85	SMA