
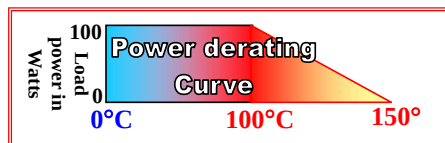


Coaxial Isolator, 400-600MHz SMA Connector, 100-200Watts

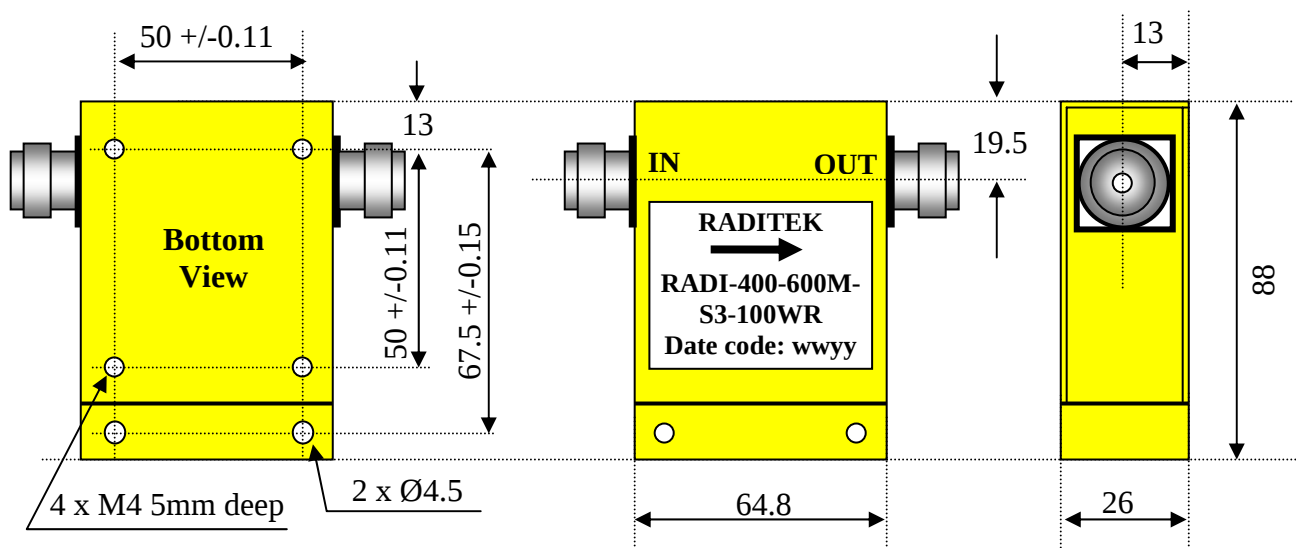

Direction of RF:		
R	Default	→
L		←

Units: mm
Not to scale

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Order Examples: **RADI-400-600M-S3-100WR**
I=ISOLATOR / C=CIRCULATOR

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
400-600	0.8	17	1.35	100	100	-10 to +60	SMA
400-600	0.8	17	1.35	200	200	-10 to +60	SMA
450-470	0.4	21	1.20	100	100	-10 to +60	SMA
450-500	0.3	25	1.11	100	100	-10 to +60	SMA