
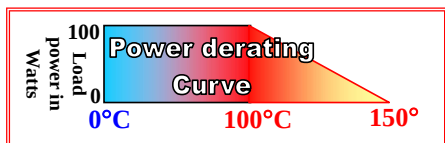


Coaxial Isolator, 400-650MHz (Full Bandwidth)

SMA Connector, 50Watts

RADI-400-650M-SX-50WR

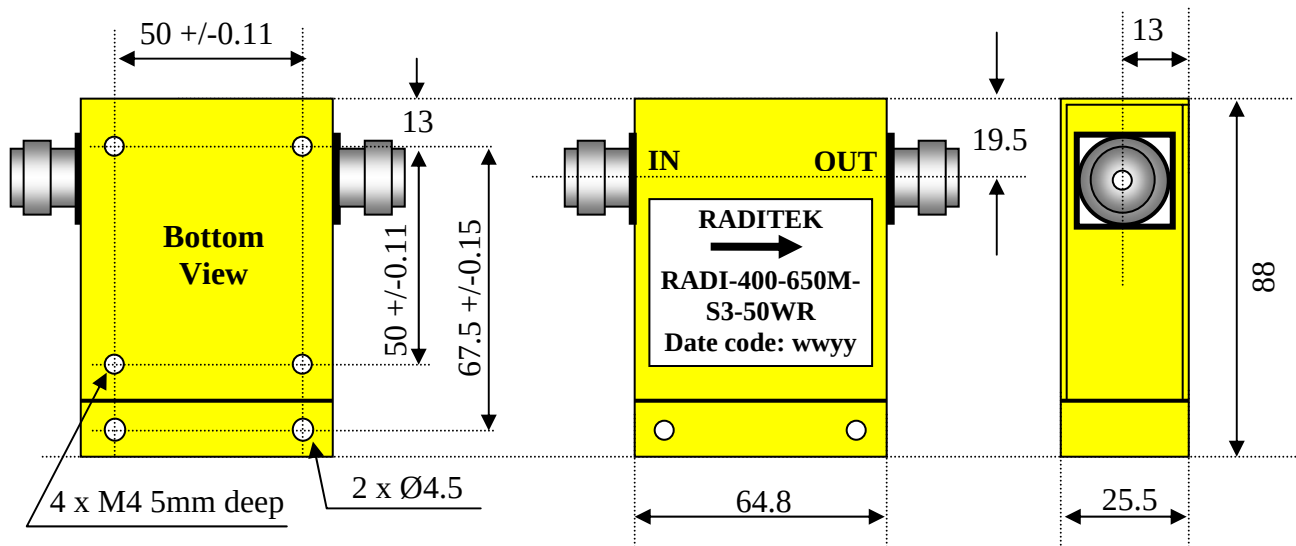

Direction of RF:		
R	Default	→
L		←

Units: mm
Not to scale

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Order Examples: RADI-400-650M-S3-100WR
I=ISOLATOR / C=CIRCULATOR

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp Range °C	Connector
400-650	0.8 1.2	14 12	1.60 1.70	50	50	+25 -10 to +50	SMA