


Coaxial Double Junction Isolator, 410-430MHz, Split Bands SMA, 25 Watts (60 Watts Forward)


RADI-410-420M-DJ-S3-25WR

RADI-420-430M-DJ-S3-25WR

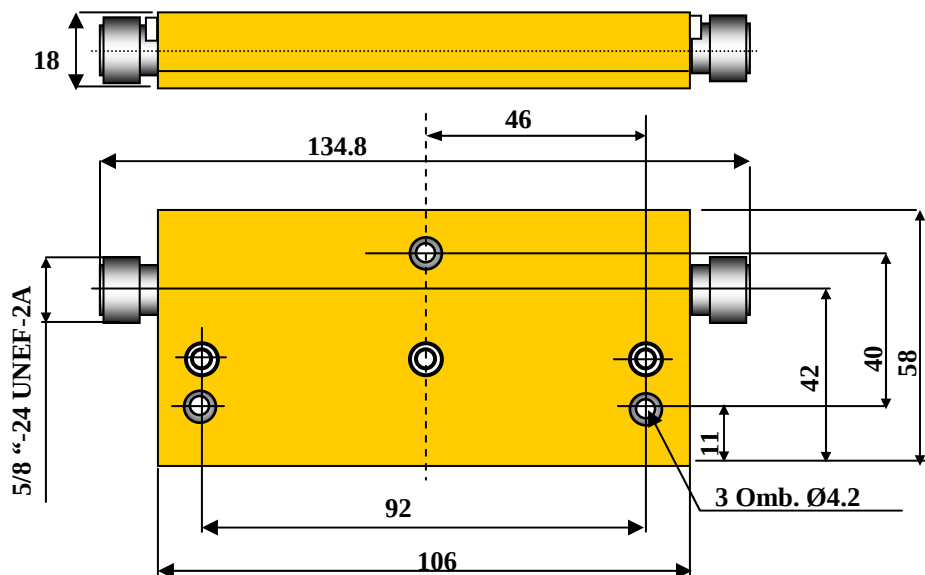

Tolerance (unless otherwise stated):

Hole diameter ± 0.004
Dimensions ± 0.015
Machined surfaces $63\sqrt{\text{ }}$
Flatness $\pm 0.001/\text{inch}$
Bend radius $1/32 \text{ inch}$

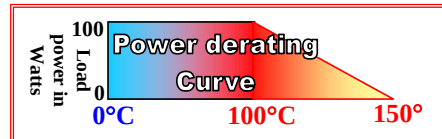

Direction of RF:		
R	Default	
L		

Units: mm
Not to scale

Order Examples: **RADI-450-470M-DJ-S3-5WR**
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
410-420	0.5	45	1.25	60	25	-40 to +70	SMA
420-430	0.5	45	1.30	60	25	-30 to +70	SMA