


Coaxial Double Junction Isolator, 450-470MHz


SMA, 5 Watts

RADI-450-470M-DJ-S3-5WR

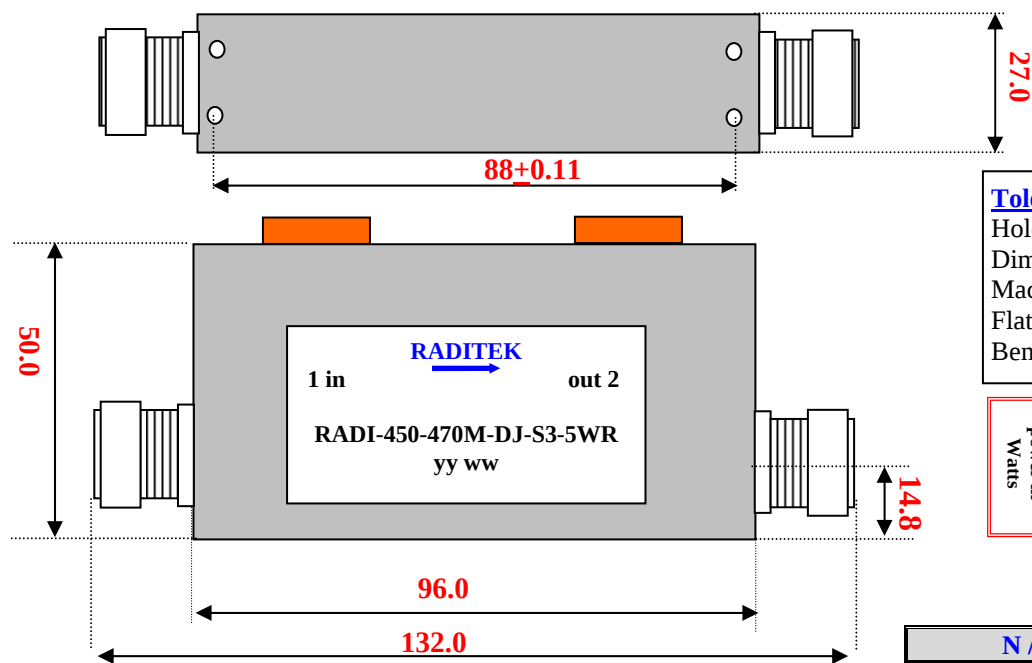

Tolerance (unless otherwise stated):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

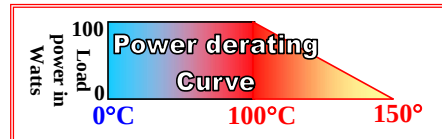

Direction of RF:		
R	Default	
L		

Units: mm
Not to scale

Order Examples: RAD**I**-450-470M-DJ-S3-5WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
450-470	0.6	45	1.20	5	5	-10 to +60	SMA