



Coaxial Isolator, 470-650MHz N-Type Connector, 100 Watts (300 Watts Forward) RADI-470-650M-N3-100WR(300W)

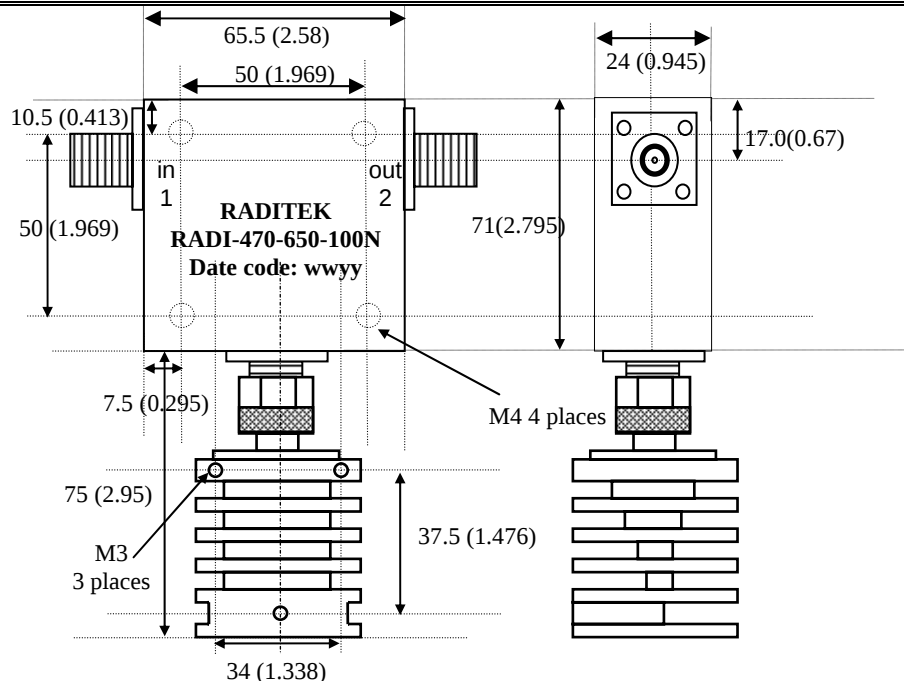

Tolerance (unless otherwise stated):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

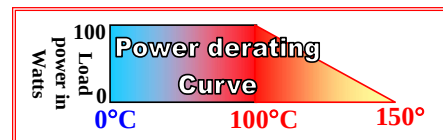

Direction of RF:	
R	Default →
L	←

Units: mm
Not to scale

Order Examples: RADI-470-650M-N3-100WR(300W)

I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator		Circulator		
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Op. Temp °C	Connector
470-650	0.6	17	1.40	300	100	-10 to 60	N-Type