



Coaxial Isolator, 470-806MHz, Split Bands N-Type Connector, 150 Watts (200 Watts Forward) RADI-470-580M-N3-150WR(200W Fwd))

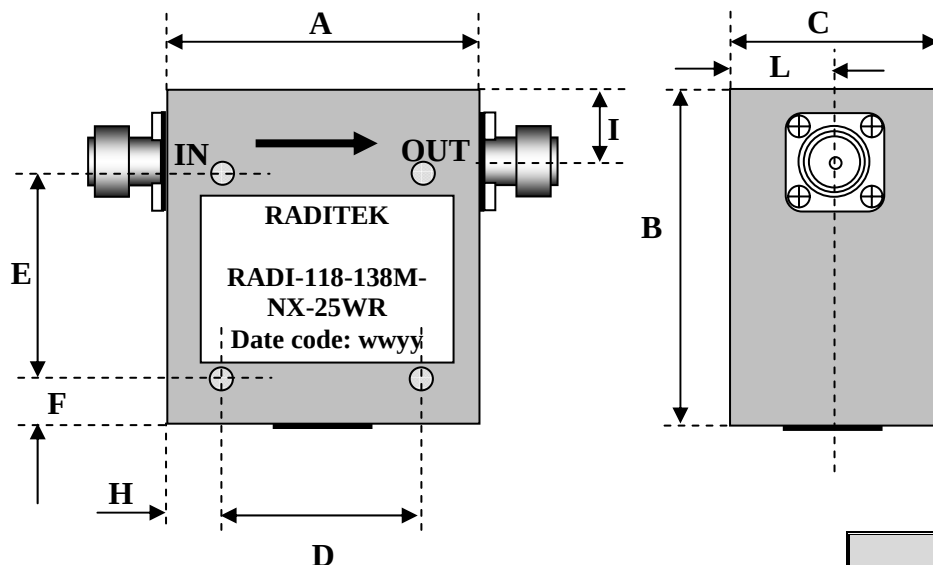

Tolerance (unless otherwise stated):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

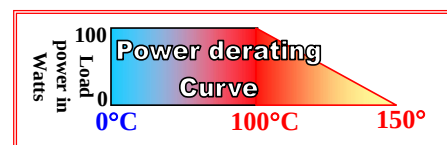

Direction of RF:		
R	Default	
L		

Units: mm
Not to scale

Order Examples: RADI-470-580M-N3-150WR(200W)
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	48.5	53.5	20.2	tba	tba	tba	tba	tba	tba	mm
										mm

Size#	Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
1	470-580	0.6	20	1.15	200	150	-30 to +85	N-Type
1	554-650	0.6	20	1.15	200	150	-30 to +85	N-Type
1	605-806	0.6	20	1.15	200	150	-30 to +85	N-Type