
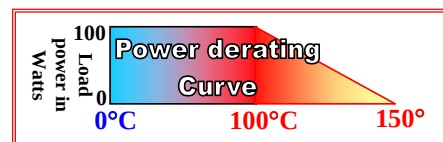


Coaxial Circulator, 2.0-2.6GHz, dd6 Package, Split Bands SMA Connector, 1or10 Watts RADC-2.3-2.6-dd6-S23-10WR

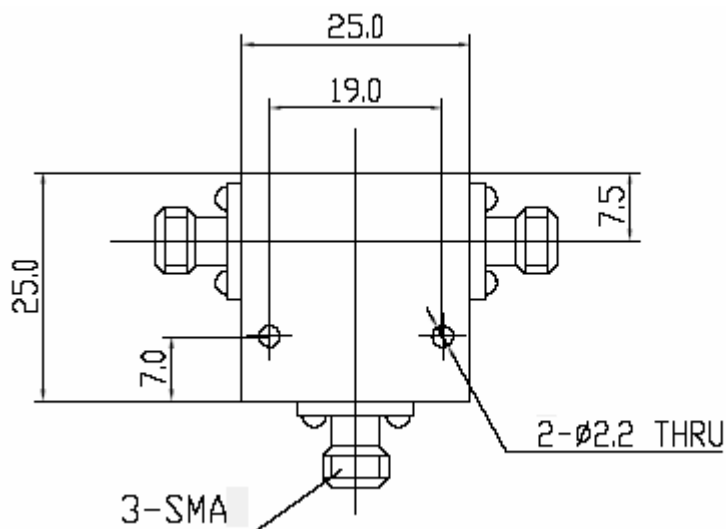

Direction of RF:	
R	Default 
L	

Units: mm
Not to scale

Order Examples: RADC-2.0-2.5-S23-1WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
2.0-2.5	0.5	20	1.29	10	10	-30 to +70	SMA
2.3-2.4	0.3	23	1.20	10	10	-30 to +70	SMA
2.3-2.6	0.5	20	1.22	1	1	-30 to +70	SMA
2.4-2.6	0.5	20	1.22	1	1	-30 to +70	SMA