
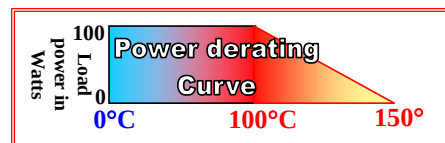


Coaxial Isolator, 2.85-3.30GHz, dd1d package

SMA Connector, 10 Watts

RADI-2.85-3.30-dd1d-S1-10WR

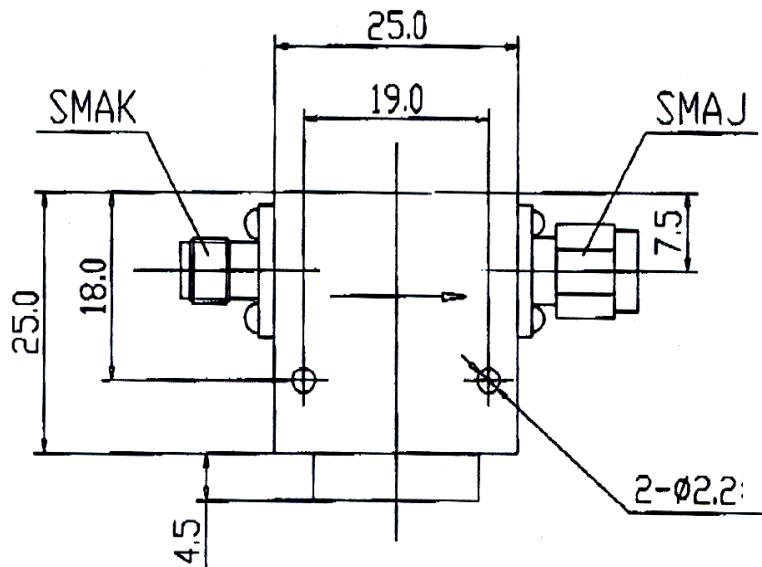

Direction of RF:	
R	Default 
L	

Units: mm
Not to scale

Order Examples: RADI-2.85-3.30-dd1d-S1-10WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
2.85-3.30	0.5	20	1.25	10	10	Tba	SMA