


Coaxial Isolator or Circulator, 950-1850MHz

SMA Connector, 1-50 Watts

RADI-950-1450M-S3-1WR, RADI-1350-1850M-S3-50WR

RADC-950-1450M-S23-1WR, RADC-1350-1850M-S3-50WR (Circulator+Ext load)

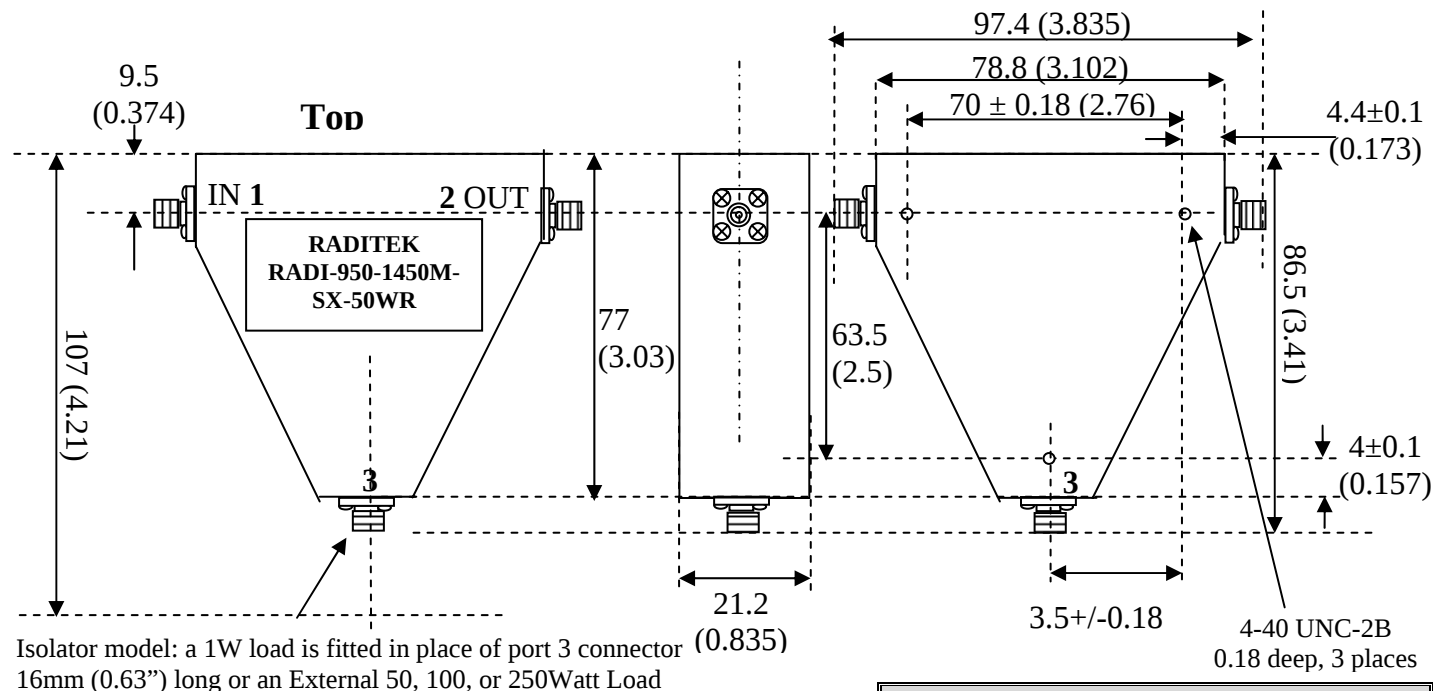

Direction of RF:		
R	Default	
L		

Units: mm
Not to scale

Order Examples: RADC-950-1850M-S23-50WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Op. Temp °C	Storage Temp °C	Connector
950-1450	0.7	15	1.40	50	1	1 to +50	-40 to +70	SMA
1350-1850	0.4	19	1.25	50	50	1 to +50	-40 to +70	SMA