


## Coaxial Isolator or Circulator, 2.15-2.60 GHz Cryogenic, 77°K SMA or PIN Connectors, 1Watt

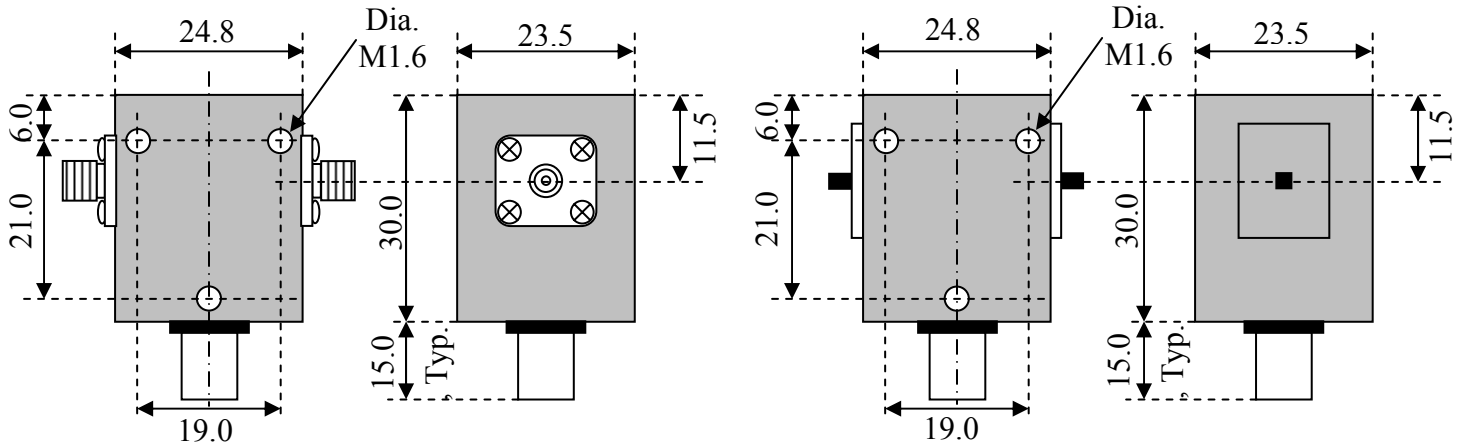

**Units: mm  
Not to scale**

Optional – Input/Output pin: Ø=9mm, Length=3.0mm

**Order Examples: RADI-2.15-2.60-Cryo-S3-1WR  
I=ISOLATOR / C=CIRCULATOR**

SMA Connector options (X)				
Isolator		Circulator		
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Direction of RF:	
<b>R</b>	Default ►
<b>L</b>	◄

Specifications: GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1 50Ohm Max	Rated Power (Fwd) Watts (avg.)	Rated Power (Rev) Watts (avg.)	Operating Temp. °k	Specs @ -196~+50 Temp. °C
2.15-2.60	0.4	19	1.30	1	1	77	0.7/16/1.40