


RADITEK INC.

Circulators with SMA Connectors 150-225MHz and 225-400MHz

RADC-150-225M-S23-2W

RADC-225-400M-S23-2W

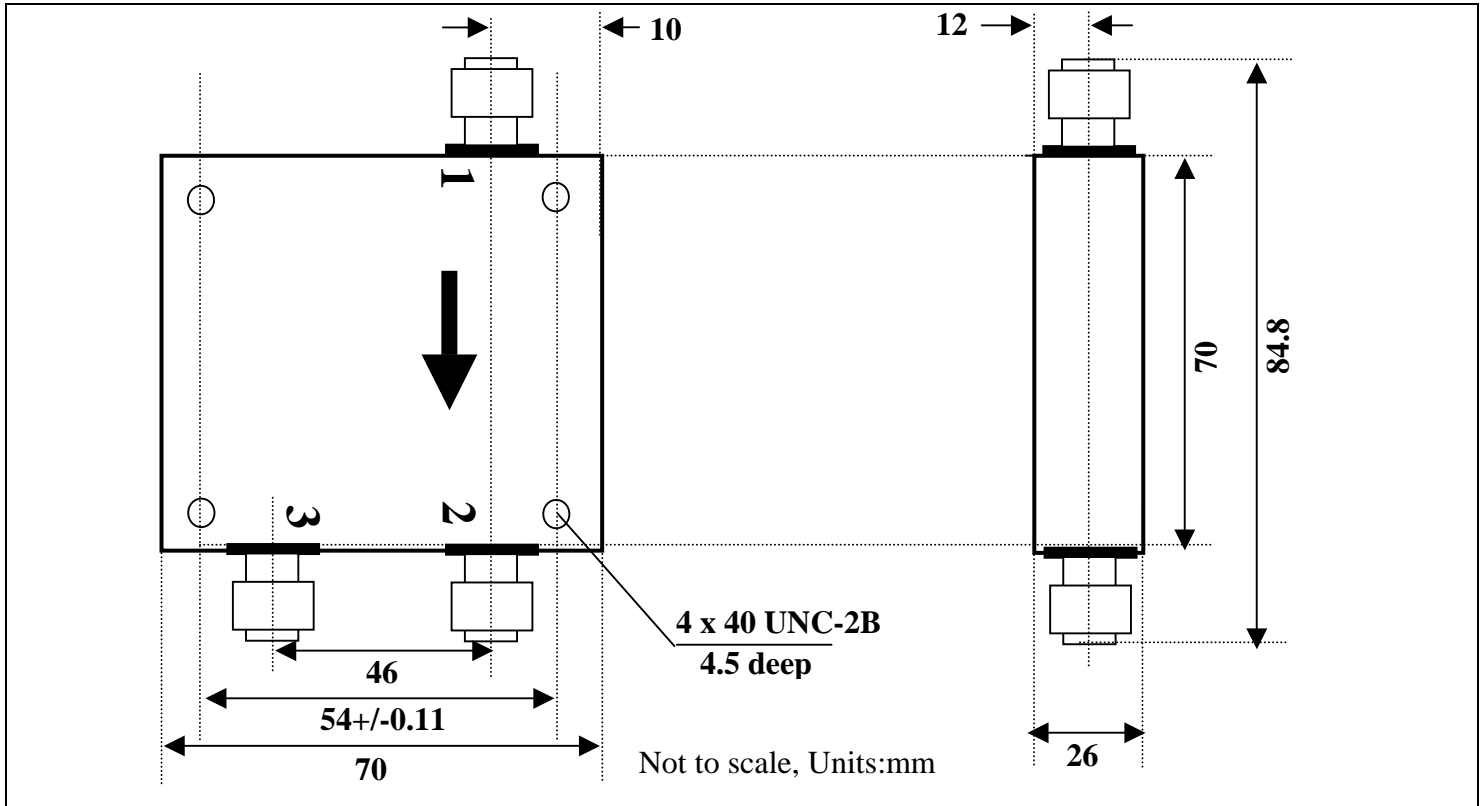

Specifications:			
Frequency	150-225	225-400	MHz
Insertion loss	1.5/1.0	1.5/1.0	dB
Isolation	15/17	15/17	dB
VSWR	1.5/1.4	1.5/1.4	:1
Power handling	2	2	Watt
Temperature range/ Room Temperature	-10 to + 50 +25	-10 to + 50 +25	°C*

		circ	circ
Port 1	Port 2	Port 3 male	Port 3 female
female	male	-11	-21
male	female	-12	-22
female	female	-13	-23
male	male	-14	-24

RADC-150-400M-S23-2W

Specifications may be subject to change

11/17/04

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com