


RADITEK INC

Split Band Coaxial Circulator, 45-95MHz, SMA, 1 Watt, Clockwise
RADC-45-55M-S3-1WR, RADC-55-70M-S3-1WR, RADC-70-95M-S3-1WR

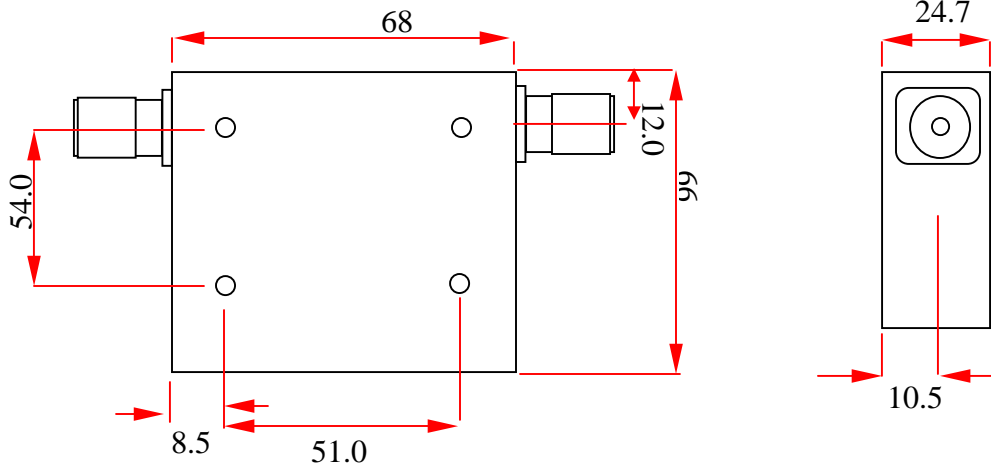

Connector option table

		Iso	Circ	Circ
Port 1	Port 2	Iso	Port 3 male	Port 3 female
female	male	-1	-11	-21
male	female	-2	-12	-22
female	female	-3	-13	-23
male	male	-4	-14	-24

Specifications				
Frequency	45-55	55-70	70-95	MHz
Insertion Loss	1.2/1.4	1.2/1.4	1.2/1.4	dB
Isolation	17/15	17/15	17/15	dB
VSWR	1.4/1.5	1.4/1.5	1.4/1.5	:1
	Room temp/-0 to +50	Room temp/-0 to +50	Room temp/-0 to +50	°C

Specifications may be subject to change

11/10/04

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com