


RADITEK

Circulator, Coaxial, SMA, 6kW RADC-960-1215M-N23-6kW Pulse Power

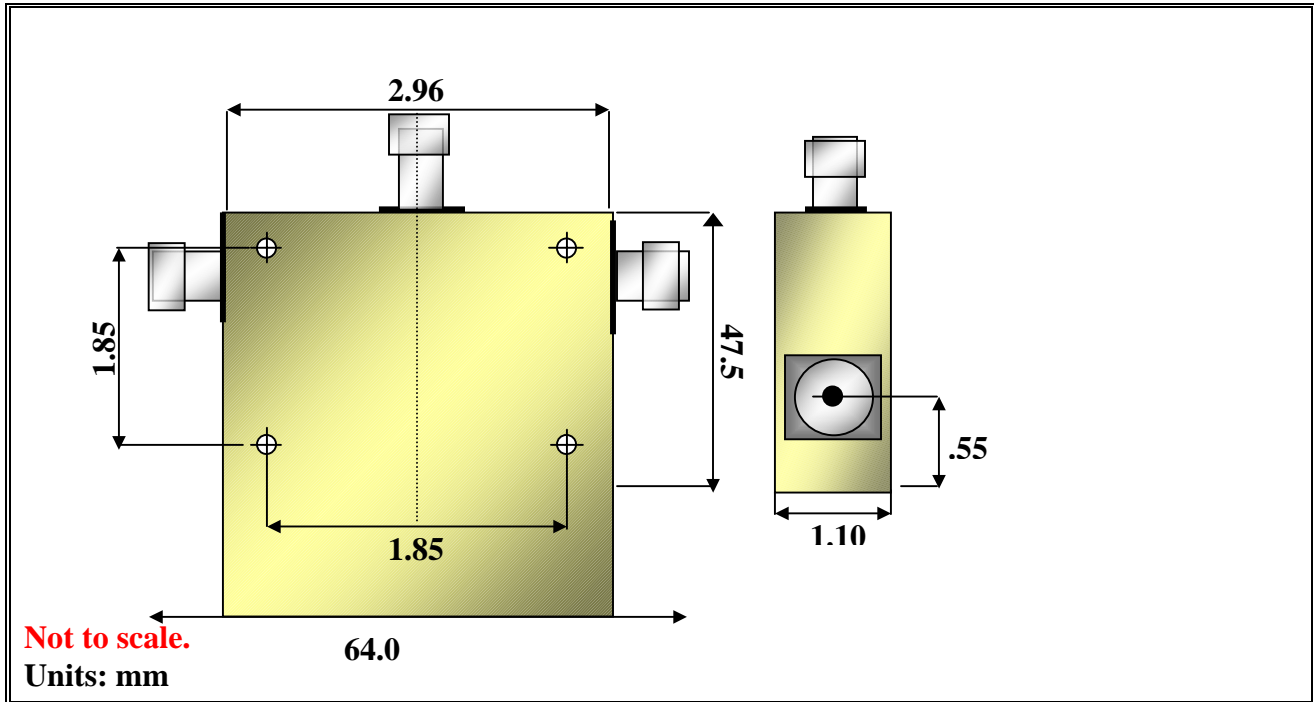

Tolerance (unless stated otherwise):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

SMA Connector options (X)

		iso	circ	circ
Port 1	Port 2	iso	port 3 male	port 3 female
female	male	-1	-11	-21
male	female	-2	-12	-22
female	female	-3	-13	-23
male	male	-4	-14	-24

Specifications:		
Frequency:	960-1215	Mhz
Insertion Loss:	0.3	dB (maximum)
Isolation:	18	dB (minimum)
VSWR:	1.20	:1
Rated power	6	Kilo Watts (Pulse)
Operating temperature	+10 to +45	°C