



# RADITEK

## 500-1000MHz Isolator or Circulator

### RADI-500-1000M-S3-1W

options at 5,10,20w reverse power are available

### RADC-500-1000M -S23-10W

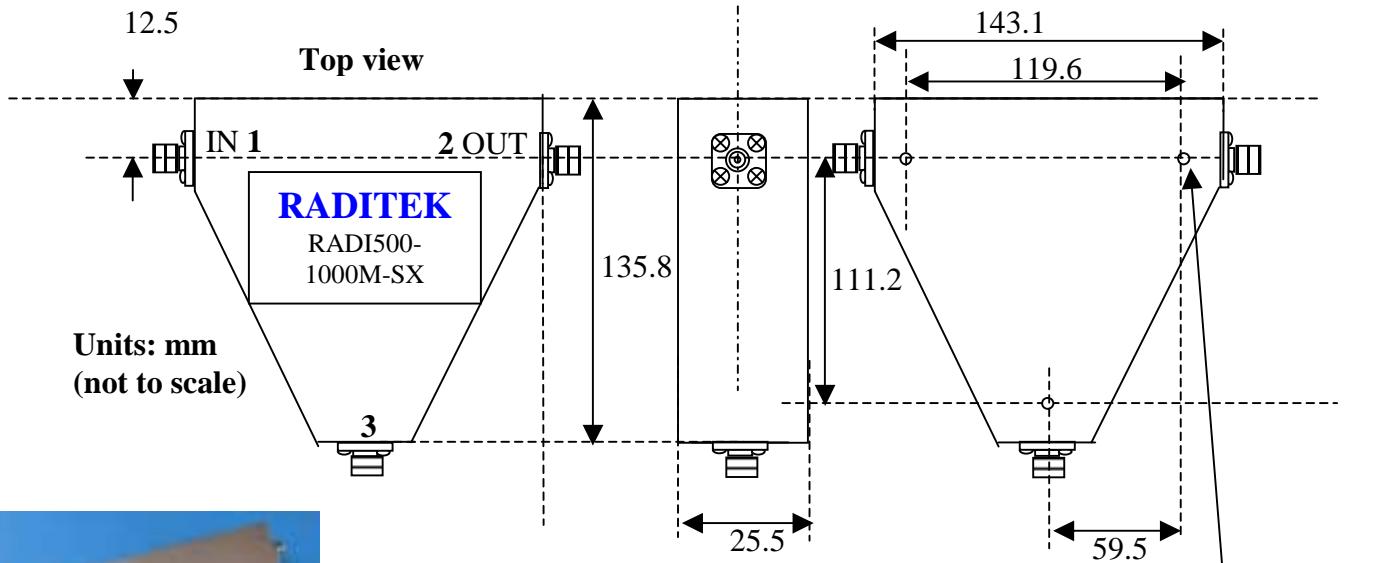

Connector option table

Port 1	Port 2	Iso	Circ	Circ
		Iso	Port 3 male	Port 3 female
female	male	-1	-11	-21
male	female	-2	-12	-22
female	female	-3	-13	-23
male	male	-4	-14	-24

4-40 UNC-2B  
6.35mm deep, 3 places

#### Specifications:

Frequency	500-1000	MHz
Insertion loss	0.5	dB (maximum) Room Temp / Over Temp
Isolation	17	dB (minimum) Room Temp / Over Temp
VSWR	1.35	Maximum Room Temp / Over Temp
Power Forward	1	Watts
Power Reverse	10	Watts (average)
Weight	902.0	g
Operating temperature	15-35	°C

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com