


# RADITEK

## 1.0-2.0 GHz Isolator or Circulator

### RADI-1-2G-S3-1W

options at 5,10,20w reverse power are available

### RADC-1-2G-S23-100W

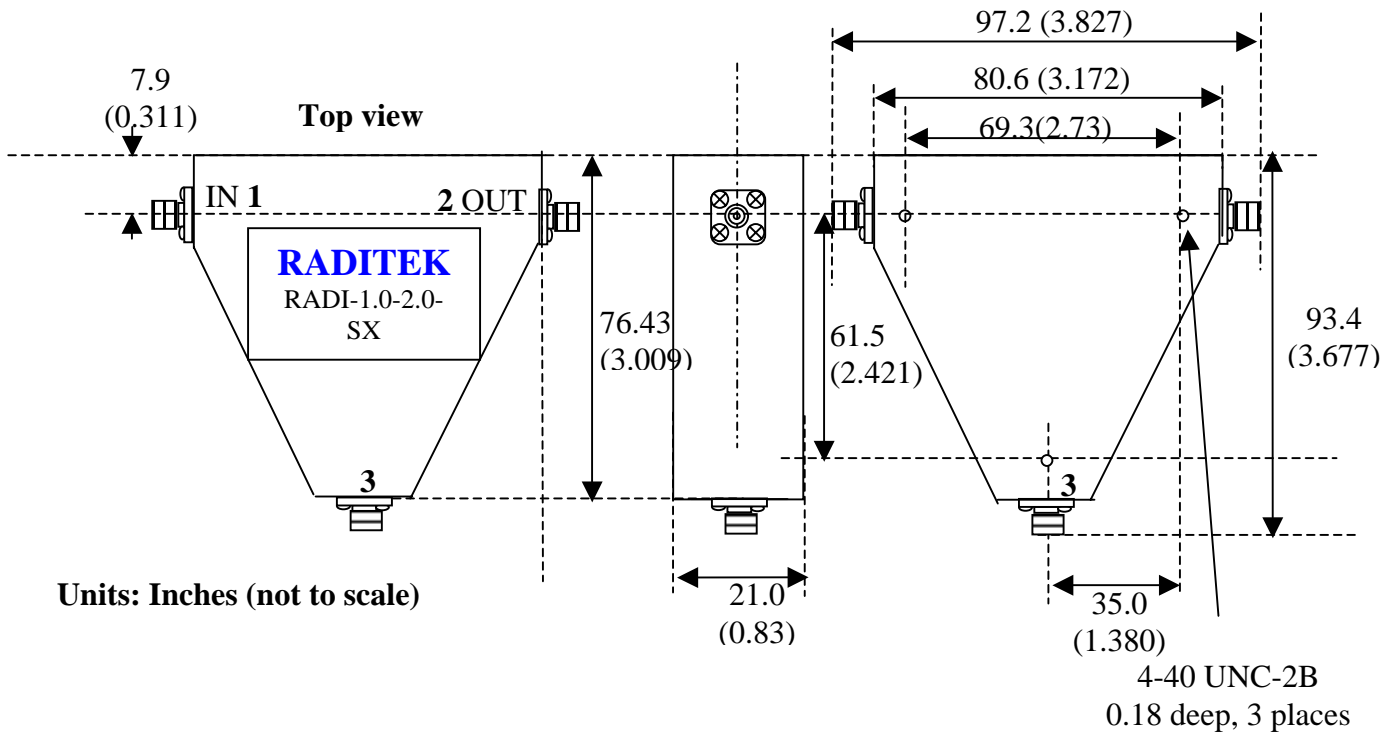

### Specifications:

Frequency	1.0 to 2.0	1.0 to 2.0	GHz
Insertion loss	0.4	1.0	dB
Isolation	20	15	dB
VSWR	1.25	1.5	:1
Power Forward	75	75	Watts
Power Reverse	1 & 2	1 & 2	Watts
Weight	250	250	g
Operating temperature	+ 25	+1 to +70	°C

### Connector option table

Port 1	Port 2	Iso	Circ	Circ
			Port 3 male	Port 3 female
female	male	-1	-11	-21
male	female	-2	-12	-22
female	female	-3	-13	-23
male	male	-4	-14	-24

RADI/C-1-2G-SX

Specifications may be subject to change

08/02/04

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: [www.raditek.com](http://www.raditek.com), E-mail: [sales@raditek.com](mailto:sales@raditek.com)