


RADITEK

Isolators or Circulators, Coaxial, SMA or N, 10W RADI-1.35-2.75G-S3-10WR or RADC-1.35-2.75G-S3-50WR

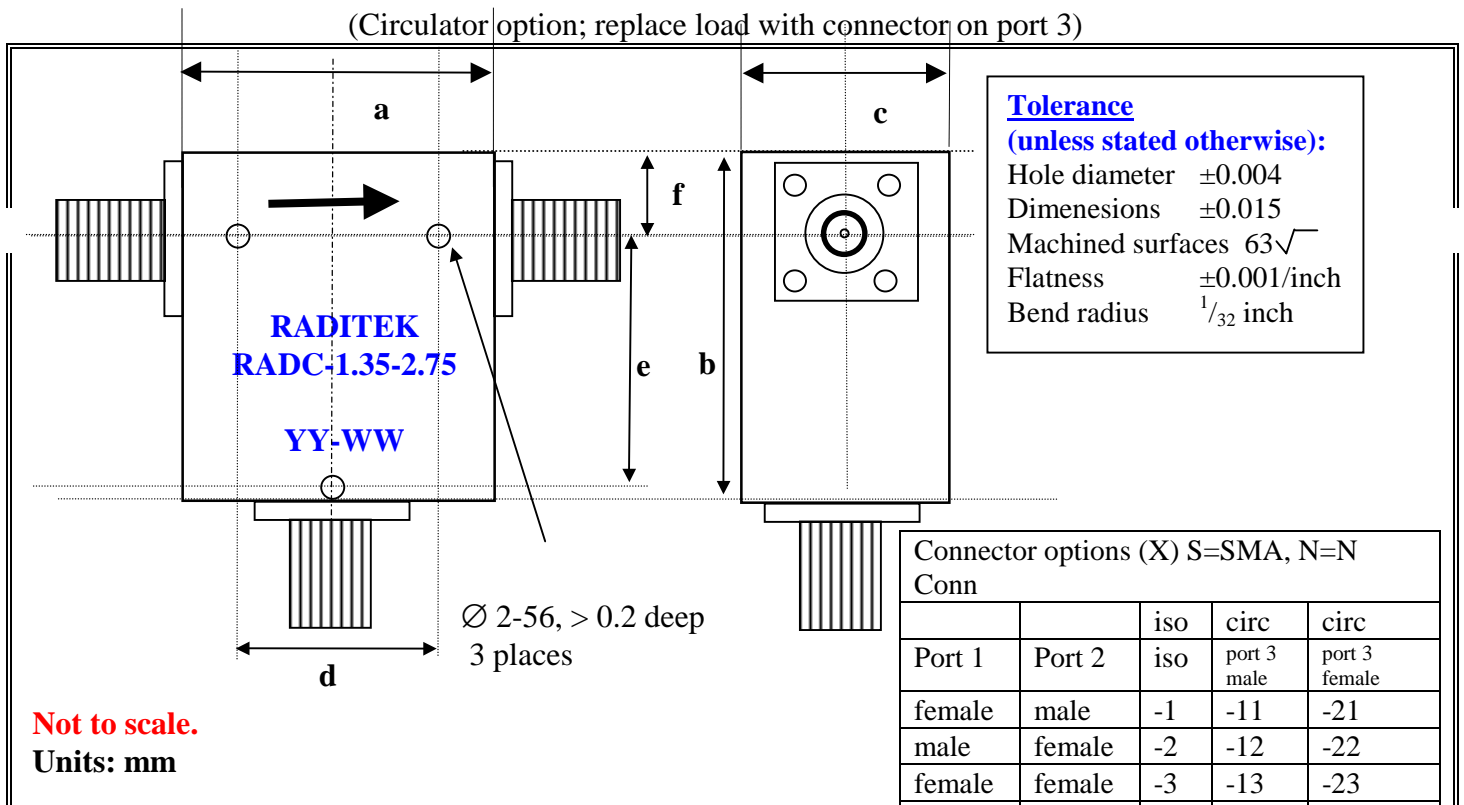

a	b	c	d	e	f	unit
2.37	2.38	0.85	1.87	1.78	0.35	inches

Specifications:	1.35-2.75			GHz
	-40 to -30	-30 to +65	+65 to +85	
Insertion loss	0.7	0.5	0.7	dB (maximum)
Isolation	16	18	15	dB (minimum)
VSWR	1.40	1.35	1.50	
Rated power (forward)	50	50	50	Watts (average)
Isolator Rated power (reverse)	10	10	10	Watts (average)
Circulator Rated power (reverse)	50	50	50	
Operating temperature	-40 to 85			°C