


RADITEK

Isolators, Coaxial RADC-144.8-150.8M-SX-5W RADI-144.8-150.8M-SX-5W

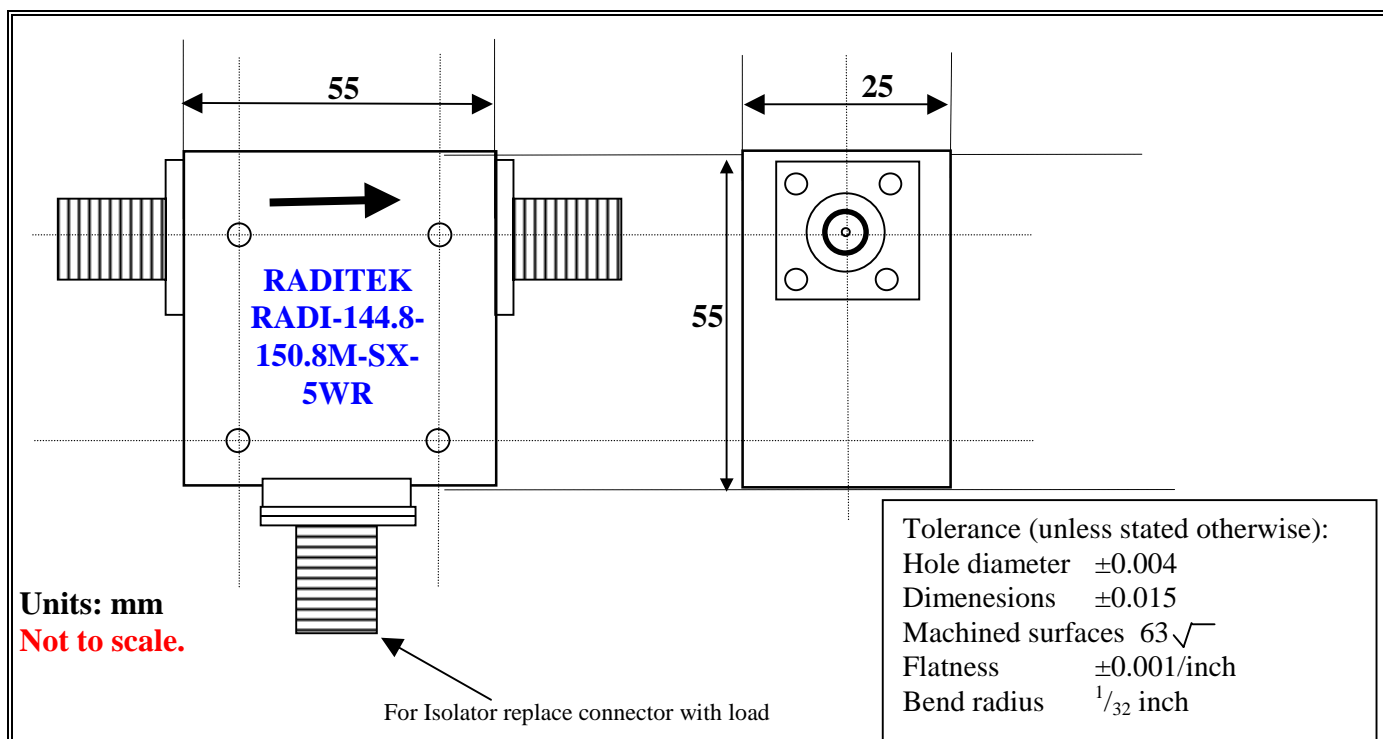

Connector options (X)				
		iso	circ	circ
Port 1	Port 2	iso	port 3 male	port 3 female
female	male	-1	-11	-21
male	female	-2	-12	-22
female	female	-3	-13	-23
male	male	-4	-14	-24

Specifications:	144.8-150.8	MHz
Bandwidth	Full	
Insertion loss	0.5	dB (maximum)
Isolation	20	dB (minimum)
VSWR	1.25:1	dB (minimum)
Rated power (reverse)	5	Watts (average) {power in load}
Operating temperature	-10 to +50	°C