


## Isolator, Circulator 18 to 26.5GHz, Full Bandwidth SMA or K (2.9)/(2.4) connectors RADI/ RADC-18-26.5G-S/K(2.9)/(2.4)x-1WR/L

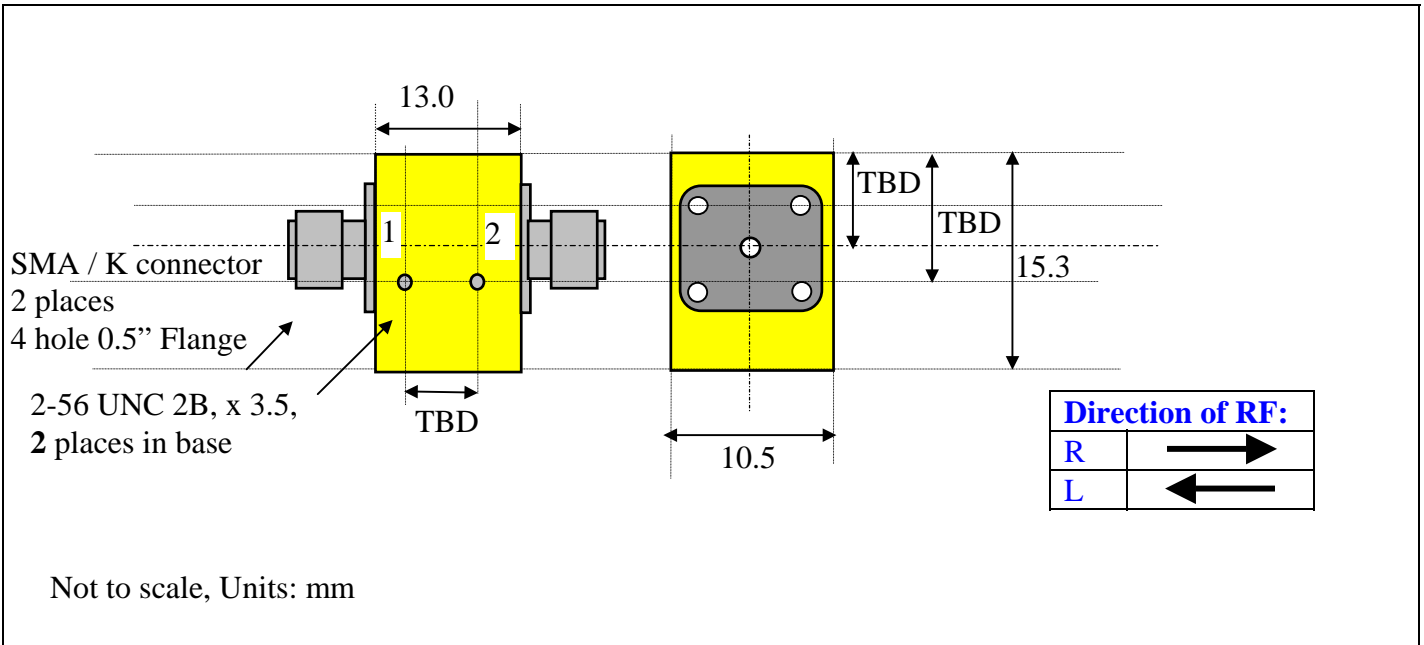

<b>Specifications:</b>		
Frequency	18 to 26.5	GHz
Bandwidth	Full	GHz
Insertion loss	1.0	dB
Isolation	16	dB
VSWR	1.5:1	
Power handling	1	Watt
Temperature range	-40 to 70	°C
Connector	SMA/ K (2.9)/ (2.4)	

<b>SMA / K (2.9)/(2.4) Connector options (X)</b>				
		Iso	circ	circ
Port 1	Port 2	Iso	Port 3 male	Port 3 female
female	male	-1	-11	-21
male	female	-2	-12	-22
female	female	-3	-13	-23
male	male	-4	-14	-24