


RADITEK

225 to 400 MHz, Circulator Isolator, Full Band

RADC-225-400M-NX-400W

RADI-225-400M-NX-300W

300W coaxial external load. For 200W unit contact our sales group for details.

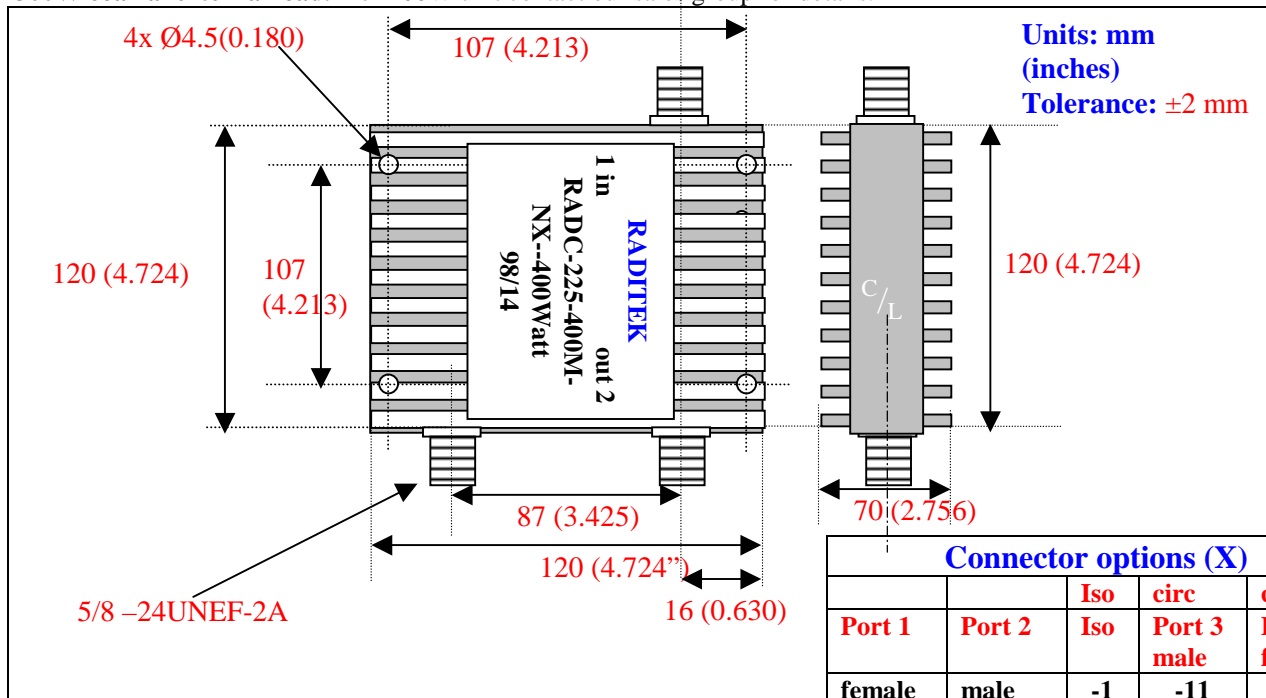

NOT TO SCALE

Units: mm

Specifications:	15~35°C (-10~50°C)	Units
Frequency	225-400	MHz (Full band)
Insertion loss	1.0 (1.5)	dB maximum
Isolation	17 (15)	dB minimum
VSWR	1.4:1 (1.5:1) max.	dB minimum
Rated Forward power	400	Watt minimum
Reflected power	300 (termination)	Watt (assumes infinite heatsink)
Input connector	Type N	
Output connector	Type N	
Operating temperature	0 to 45	°C
Storage temperature	-10 to 80	°C
Altitude	to 15,000	feet
Humidity	45 to 85	%RH

RADC-225-400M-400W-N

Specifications may be subject to change

8/1/02

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com