


RADITEK

Isolators or Circulators, Coaxial, SMA or N, 2W RADI-3.3-3.6G-SX-2W

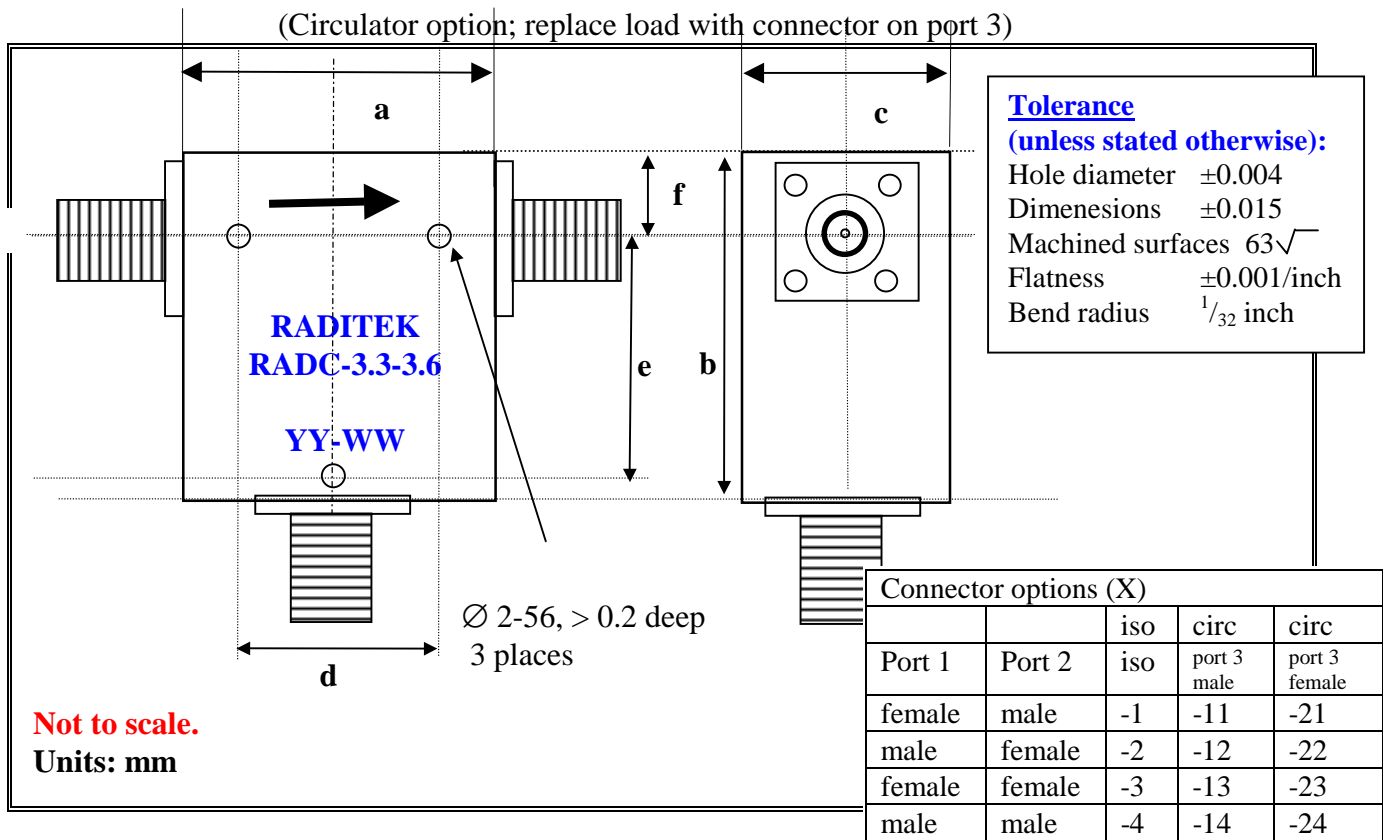

| a | b | c | d | e | f | unit |
|------|------|----|-----|-----|-----|------|
| 26.0 | 25.4 | 14 | TBD | TBD | TBD | mm |

| Specifications: | 3.3-3.6 | GHz |
|--|-----------|-----------------|
| Insertion loss | 0.4 | dB (maximum) |
| Isolation | 20 | dB (minimum) |
| VSWR | 1.25 | |
| Rated power (forward) | 2 | Watts (average) |
| Rated power (reverse) {power in load} | 2 | Watts (average) |
| Operating temperature | -40 to 85 | °C |