


# RADITEK INC.

## Isolator, Coaxial, SMA Connectors RADI-1950-1300M-S23-100WR code b

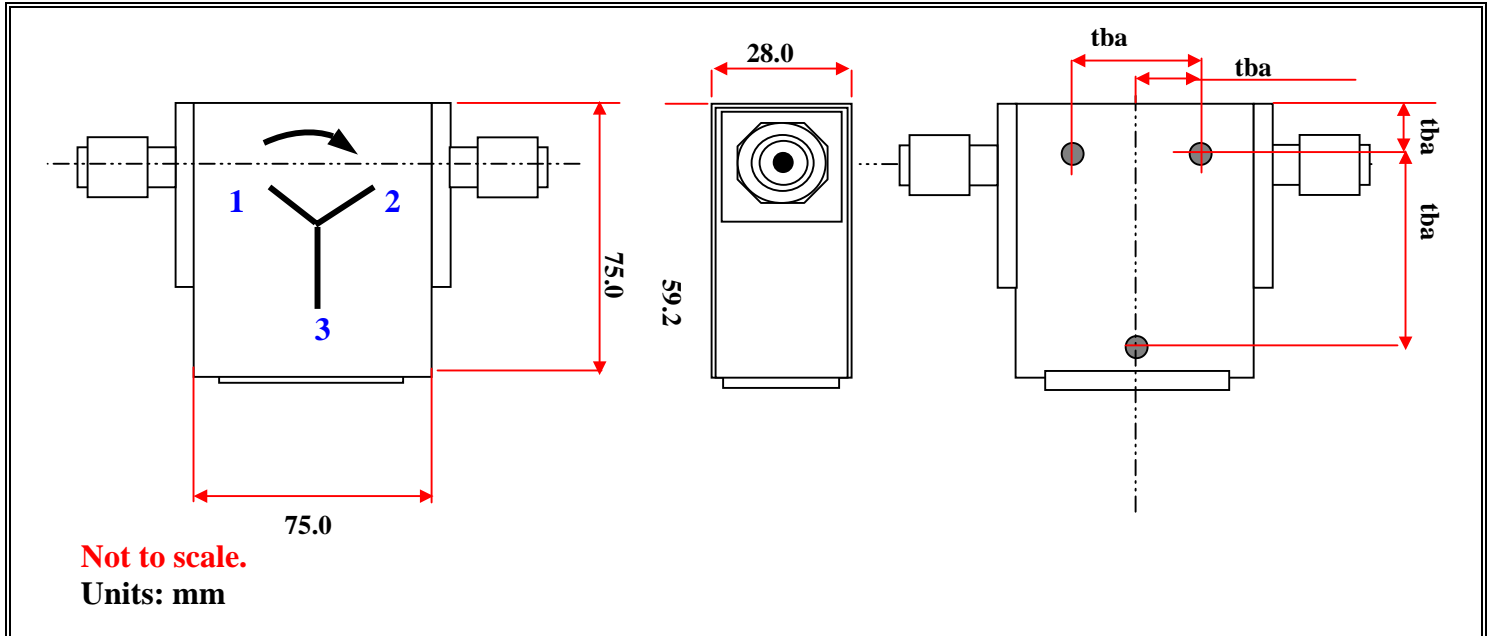

**Tolerance**  
(unless stated otherwise):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

N Connector options (X)		iso	circ	circ
Port 1	Port 2	iso	port 3 male	port 3 female
female	male	-1	-11	-21
male	female	-2	-12	-22
female	female	-3	-13	-23
male	male	-4	-14	-24

### Specifications:

Frequency:	950-1300	950-1300	Mhz
Insertion Loss:	0.3	0.35	dB (maximum)
Isolation:	19	18	dB (minimum)
VSWR:	1.25	1.3	:1
Rated power	100	100	Watt
Temperature:	Room Temp	-10 to +60	°C