


MICROSTRIP ISOLATOR, 5-6GHZ, DUAL JUNCTION, 20WATT RADII-5-6-MSDJ-20W

code-e

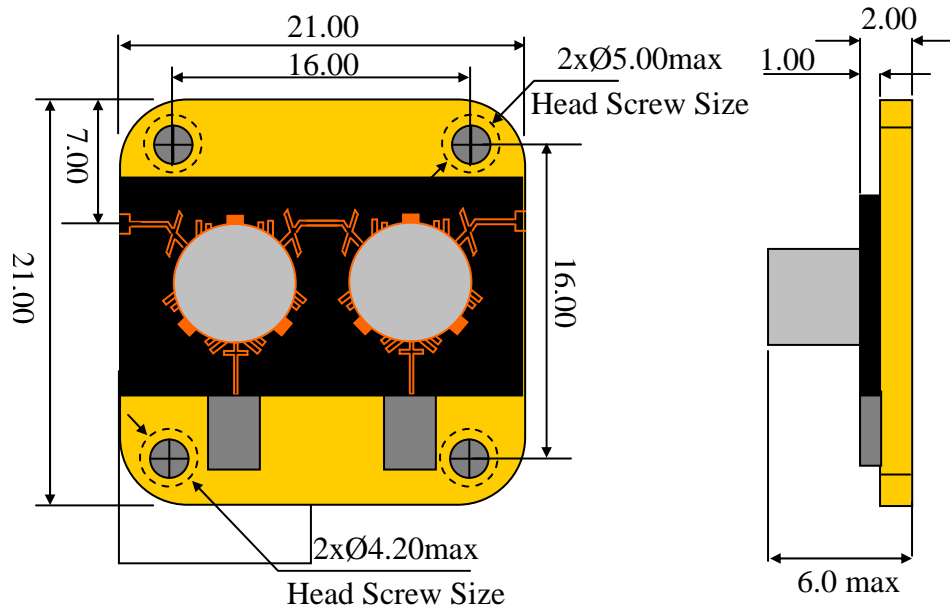

Units:mm

Notes:

- 1) Clockwise Direction.
- 2) Do not heat above 130°C
- 3) RoHS Compliant.
- 4) Load and Tuning conductor (97In3Ag)
Optional location and configuration determined by vendor.
- 5) Humidity 5 to 95% non-condensing.
- 6) Max temperature during welding process:
+350°C @ 25 msec. Pin contacts
Suitable for 3x1mils and 15x0.5mils gold ribbon.

Specifications		Units
Frequency	5-6	GHz
Insertion Loss	1.0	dB
Isolation	33	dB
VSWR	1.3	:1
Power Forward	20	Watts
Power Reverse	20	Watts
Operating Temp.	-40 to +70	°C
Non Operating Temp.	130	°C (max)