Isolator, Microstrip, 1.7-2.4 GHz , MS Package

RADI-1.7-2.4-MS-10WR-b

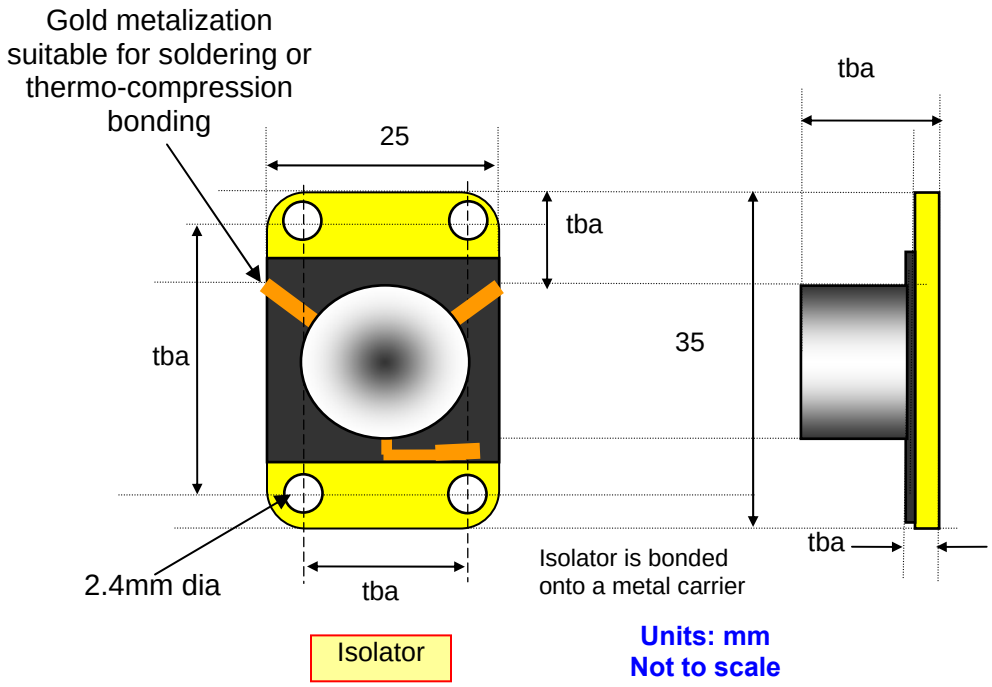

Direction of RF:		
R	Default	►
L		◄

Order Examples: RADI-1.7-2.4-MS-10WR
I=ISOLATOR

Specifications:	RT/OT			Units
Frequency	1.7-2.4			GHz
Insertion loss	0.6 / 0.8			dB max
Isolation	18 / 16			dB min
VSWR	1.3 / 1.4			:1
Rated power- Forward	10			Watts
Rated power- Reverse	10			Watts
Operating temperature	0 to +60			^{o}C
	b			

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.
Tel: (408) 266-7404 FAX: (408) 266-4483
WEB: www.raditek.com E-mail: sales@raditek.com