


## MSSM Metal Backed Substrate Circulator RADC-16.3-17.2-MSSM-14W

code-b

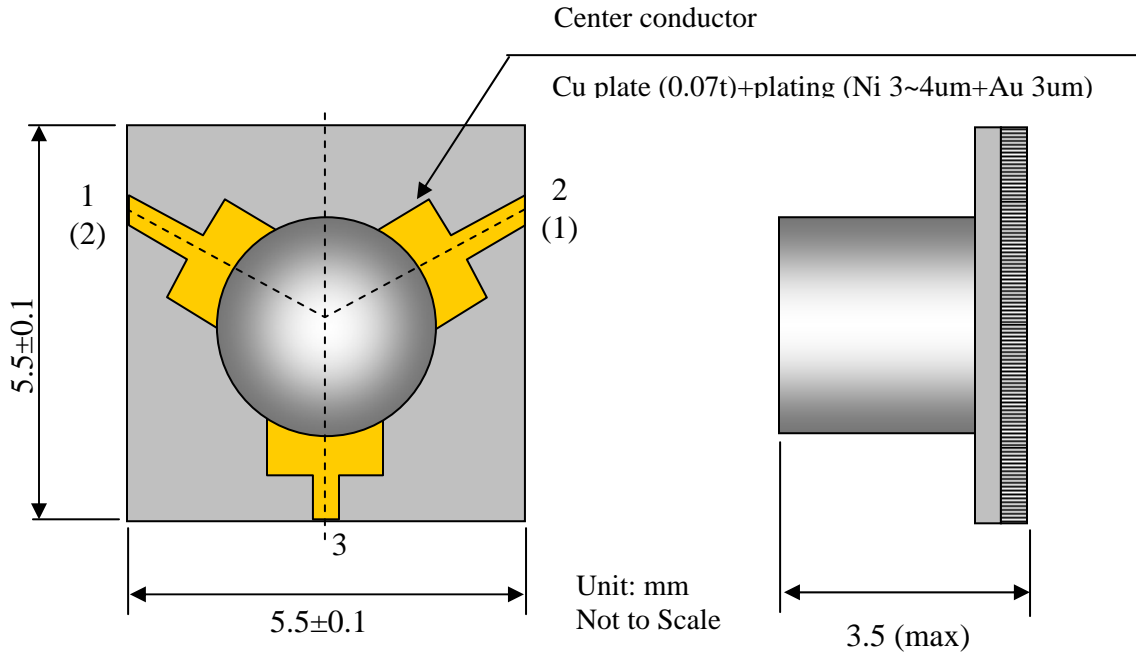

Specifications		Units
Frequency	16.3-17.2	GHz
Insertion Loss	0.4	dB (Max)
Isolation	18	dB (Min)
VSWR	1.3	:1
Average Power	14	Watts
Peak Power	33% Duty	
Port 1-2	40	Watts
Port 2-3	25	
Ambient Temp	-33 ~ +85	°C
Size	5.5 x 5.5 x 3.5	mm

Heat resistance for soldering: 200deg.C / 5 sec only  
Terminal: Ribbon can be bonded by thermo compression