


RADITEK INC.


Circulator with B4 Stripline Connectors RADC-259-261M-B4-150WR

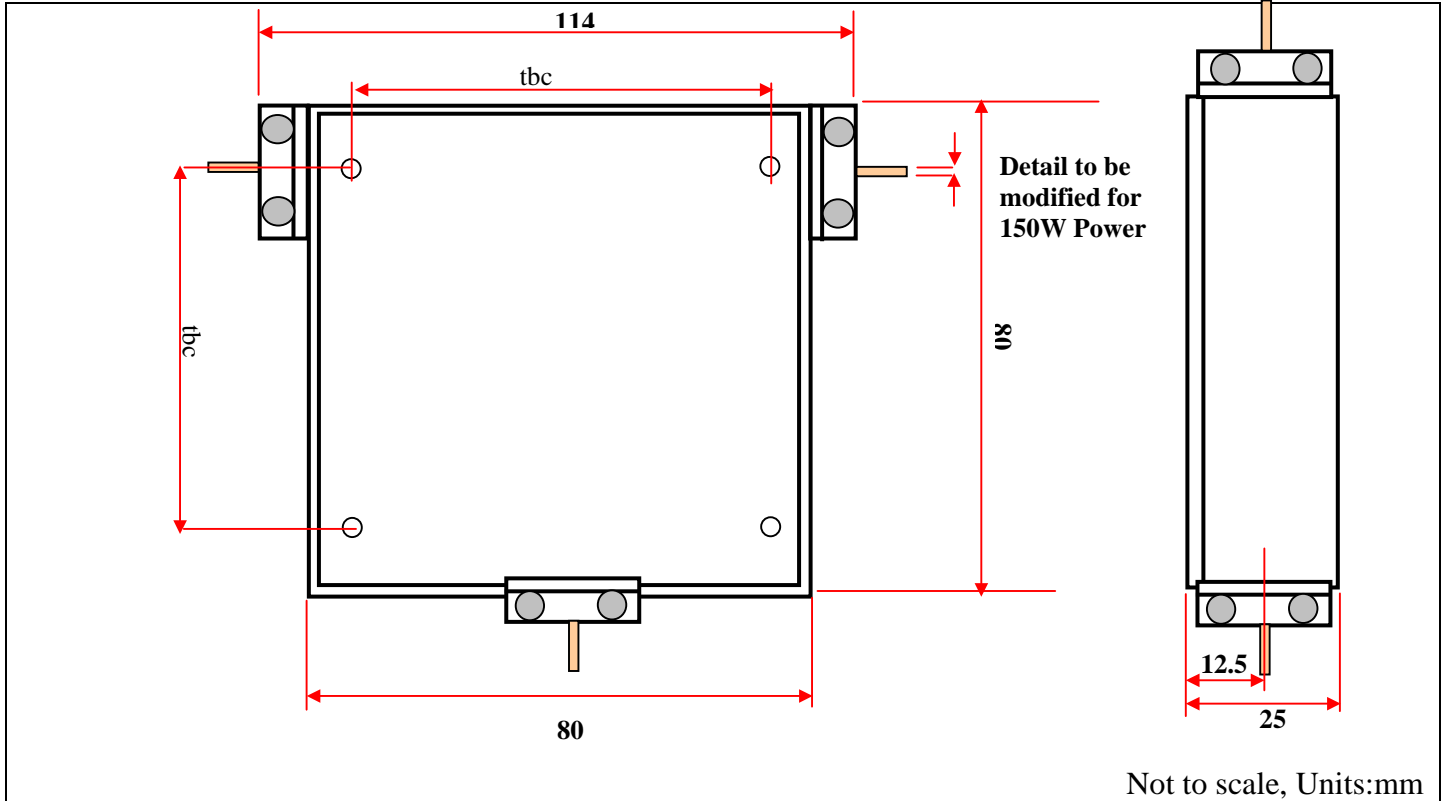

Specifications:	Full	
Frequency	259-261	MHz
Insertion loss	0.3	dB
Isolation	23	dB
VSWR	1.15	:1
Forward Power	150	Watt
Reverse Power	150	Watt
Temperature range	TBA	°C
Connector	B4	

Connector options (X)				
		Iso	circ	circ
Port 1	Port 2	Iso	Port 3 male	Port 3 female
female	male	-1	-11	-21
male	female	-2	-12	-22
female	female	-3	-13	-23
male	male	-4	-14	-24

RADITEK INC.

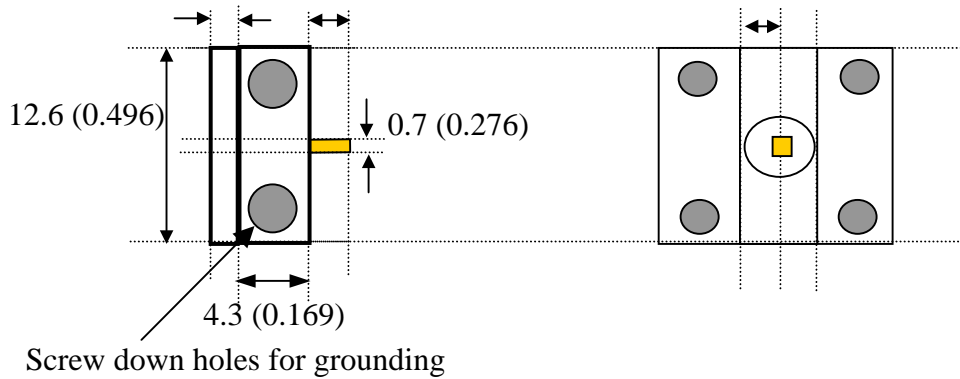

Alternative connector option (B4), so unit can be used as a "drop in." Note the screw down holes must clamp the grounding surfaces together.