


# RADITEK INC.

## Isolator, Stripline, 170 to 230 MHz

RADI-170-230-KK-150W

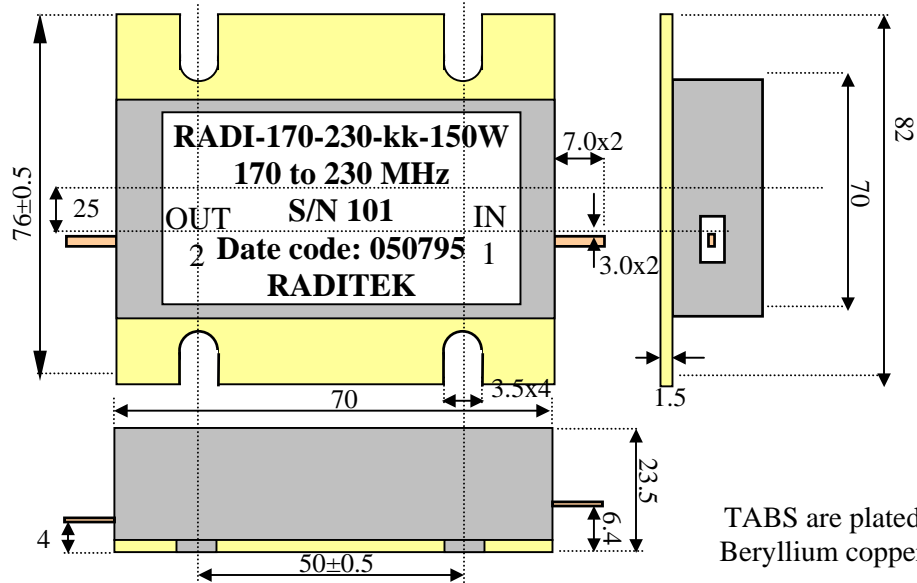

### Specifications

Specifications		
Frequency	MHz	170 to 230
Phase match	±5° in 5 piece matched sets	
Insertion loss	dB (max)	0.7 over 0° to 80° C 0.8 over -20°C to 0°C
Isolation	dB (min)	20 min over 0° to 80° C 17 min over -20°C to 0°C
Return loss (in 50Ω)	dB (max)	14 (1.5:1)
Rated power	Watts (avg) Watts (min.)	200 150 rated termination
Humidity	%RH	40 to 95
Operating temperature	°C	-20 to +80
Marking		As shown in drawing above