


Waveguide Circulator, 10-15GHz, WR75, Full or Split Bands 2 or 600Watts Reverse Power

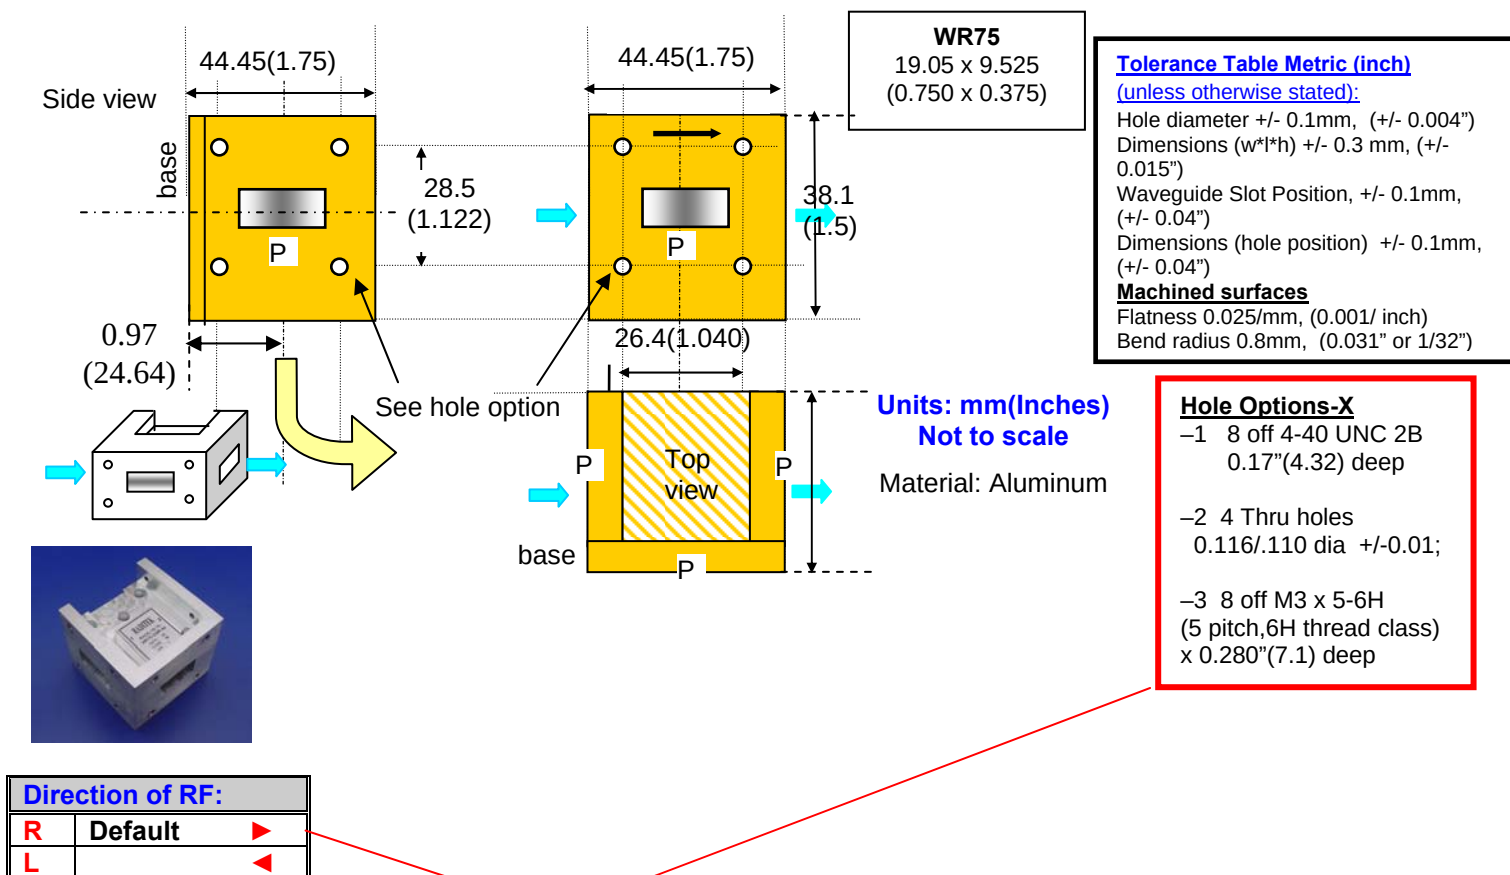

Order Examples: **RADC-10-15-WR75-2WR-1-e**
C=CIRCULATOR

Specifications	10% Bandwidth	Full Bandwidth	Full Bandwidth	Units
Frequency	10-15	10.0-15.0	13.00-14.50	GHz
Insertion loss	0.2	0.35	0.25	dB maximum
Isolation	20	20	20	dB minimum
VSWR	1.22:1	1.25:1	1.22:1	
Rated power options	2W*	600W*	2W*	Watt minimum
Waveguide interface type	WR75-UG flange	WR75-UG flange**	WR75-UG flange	
Return loss	20	19.1	20	dB minimum
Operating temperature	-30 to +70	-30 to +65	-30 to +70	°C
Storage temperature	-50 to 105	+15 to +35	-50 to 105	°C
Altitude	to 15,000	to 15,000	to 15,000	feet
Humidity	to 95	to 95	to 95	%

*25 or 600W version available.

** WR75 (UBR-120) available upon request

RADC-10-15-WR75-2-600WR-Generic-e

Specifications may be subject to change

06/20/12

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Tel: (408) 266-7404

FAX: (408) 266-4483

WEB: www.raditek.com

E-mail: sales@raditek.com