


## Waveguide, Isolator WR62 13-17 GHz 15 Watts

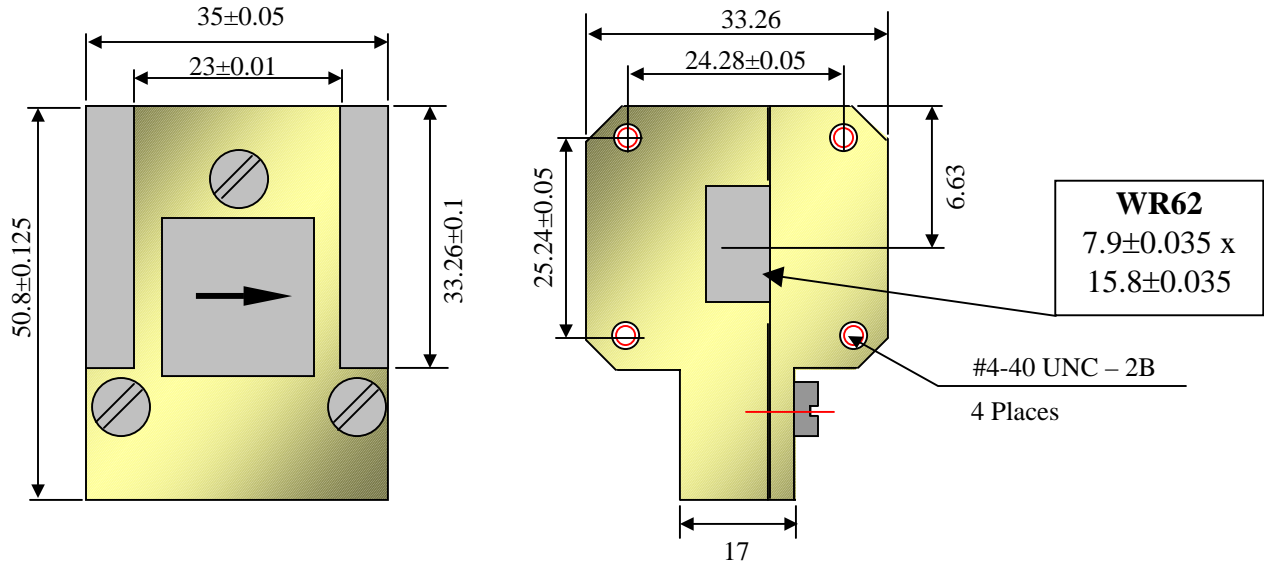

Not to scale  
Units are (mm)

<b>Specifications:</b>			
Frequency Range	13-17	13-17	GHz
Insertion loss	0.4	0.3	dB
Isolation	18	20	dB
VSWR (in and out)	1.35	1.20	Max
Forward Power	15	15	Watts (max.)
Reverse Power	15	15	Watts
Operating temperature	-40 to +70	+15 to +35	°C
Flange	WR62 / UBR-140	WR62 / UBR-140	
Material	Aluminum	Aluminum	
Finish	Chemical Film	Chemical Film	

**Note: Compulsory Air Cooling Is Required**