


Waveguide, Isolator 14.474-14.724GHz, Full Band WR62, 20Watts

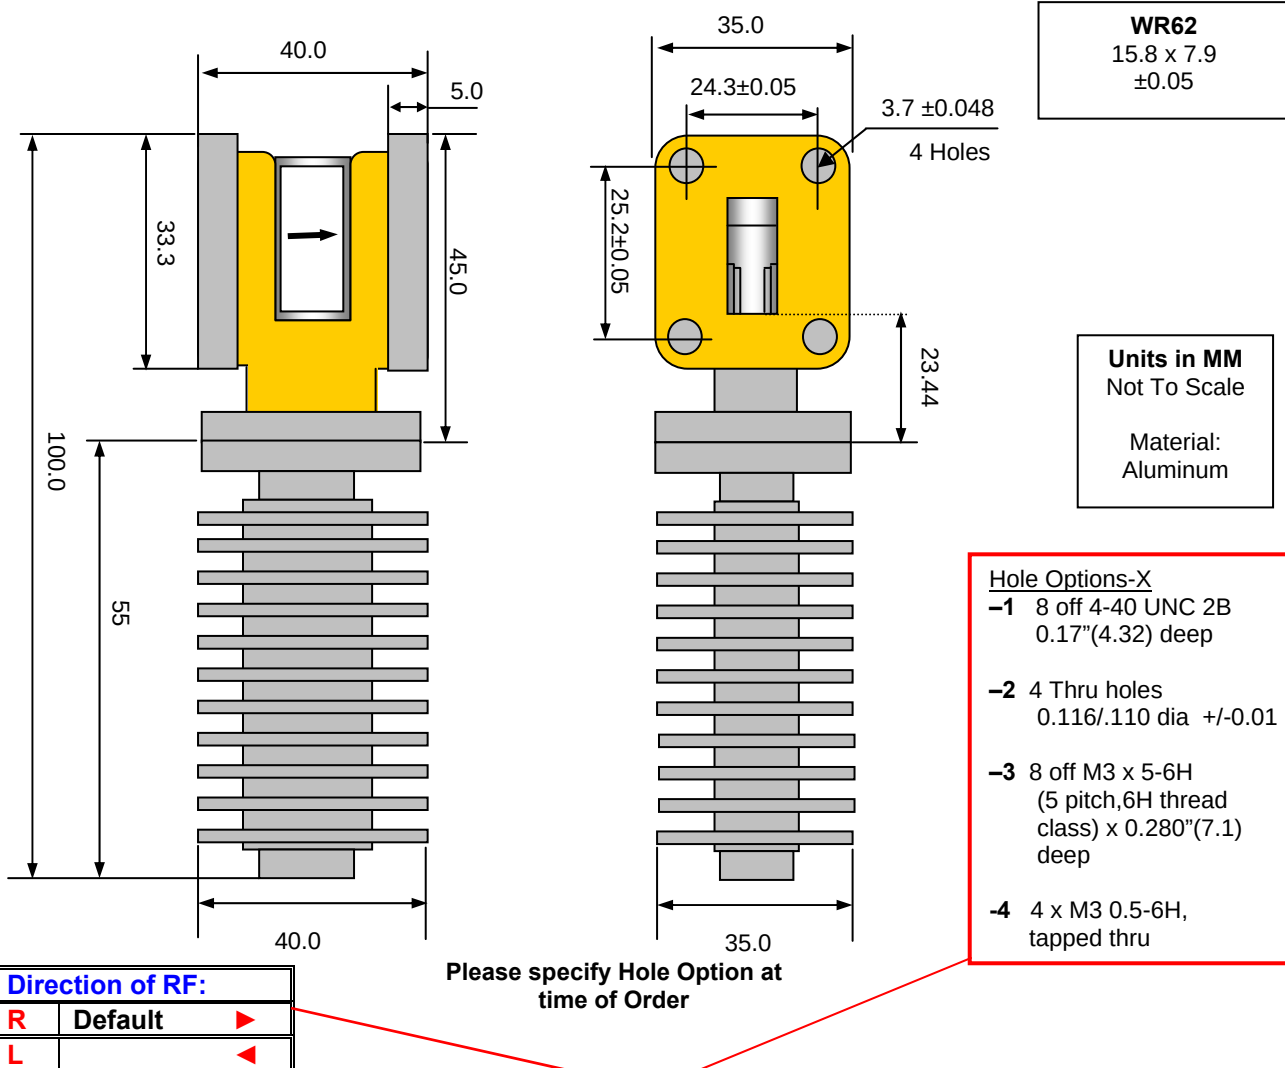

Order Examples: **RADI-14.474-14.724-WR62-20WR-1-b**
I=ISOLATOR / C=CIRCULATOR

Specifications:		Units
Frequency Range	14.474-14.724	GHz
Insertion loss	0.2	dB
Isolation	23	dB
VSWR (in and out)	1.15	Max
Forward Power	20	Watts (max.)
Reverse Power	20	Watts
Operating temperature	-15 to +35	°C
Flange	WR62	