


# RADITEK

## Waveguide, Isolator WR34 22-33 GHz (10% Bandwidth), 1 Watt

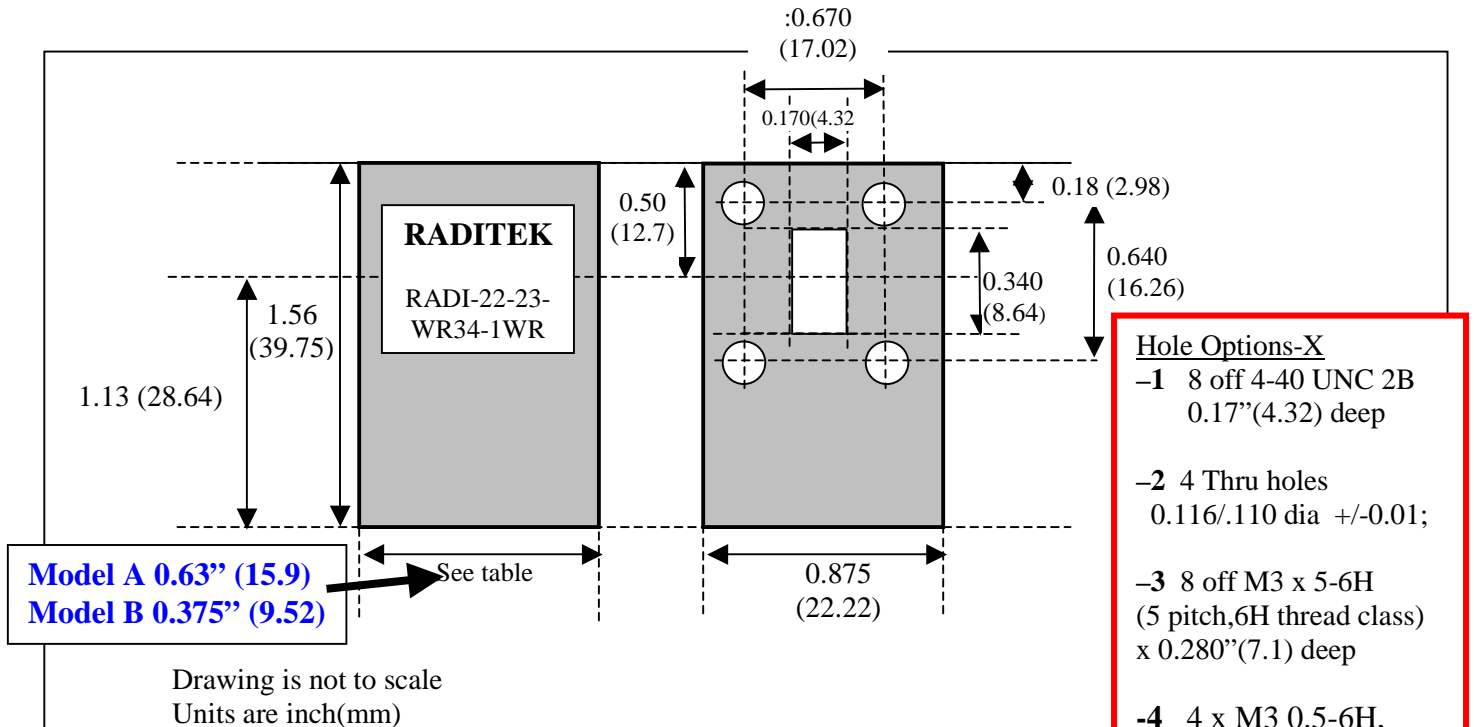

### Model A Standard

Order example "RADI-25.0-27.0G-WR34-1WR-X"

### Specifications:

	Any 10% Bandwidth	Model A	Model A	Model A	Model B	
Frequency Range		25.0-27.0	24.25-26.7	24.25-27.5	25.5-26.75	GHz
Insertion loss	0.25	0.25	0.25	0.3	0.3	dB
Isolation	20	20	20	20	20	dB
VSWR (in and out)	1.25:1	1.25:1	1.25:1	1.25:1	1.25:1	
Forward power handling	10	10	10	10	10	Watts (max.)
Reverse power	1	1	1	1	1	Watts
Operating temperature	-30 to 70	-30 to 70	-30 to 70	-30 to 70	-30 to 70	°C
Flange	UG-1530/U	UG-1530/U	UG-1530/U	UG-1530/U	UG-1530/U	