


Waveguide Isolator / Circulator, 13.5-17.5GHz Full or Part Bands WR62UG-1665/U Flange, 4 ports, 2Watts, 250Watt Average, 2.5kW Peak

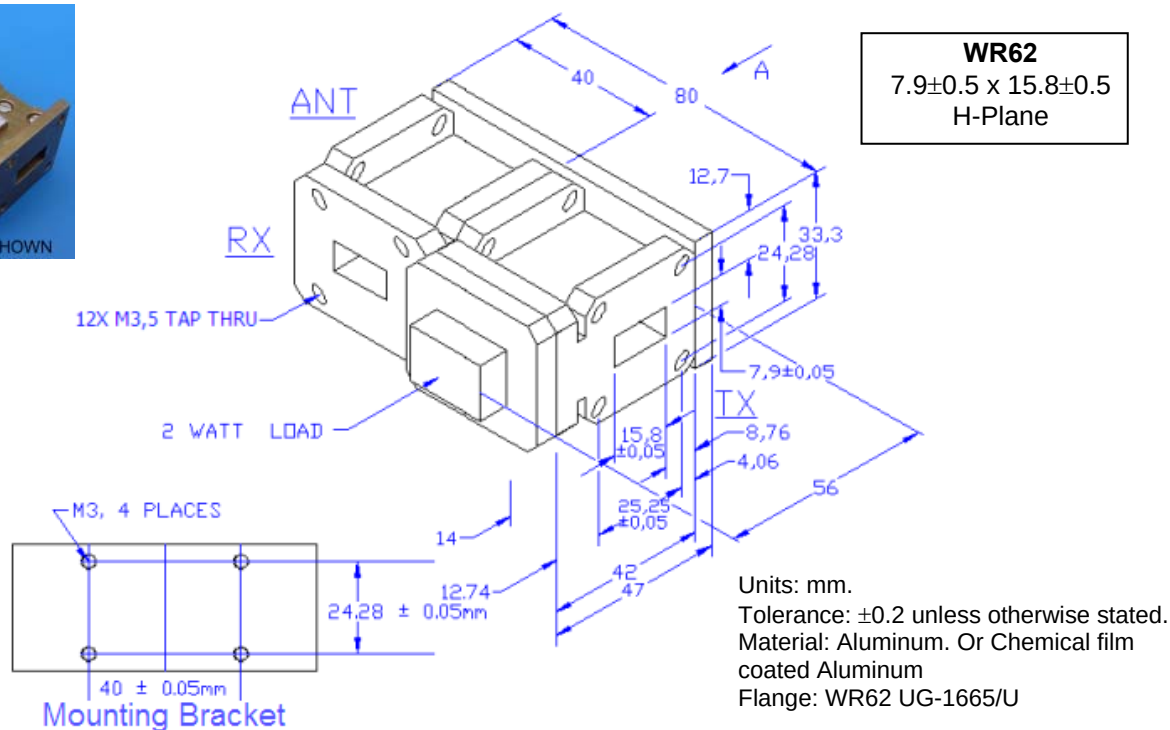

Direction of RF:		
R	Default	▶
L		◀

Order Examples: RADIC-15.5-17.5-WR62-2WLL/250W Fwd Av(2.5kW PK)-M4-b

Description: (Isolator/Circulator, 15.5-17.5 GHz, WR62UG-1665/U Flange, 2 Watts, Counter-Clockwise/Counter Clockwise Rotation, 250 Watts Forward Average Power, 2.5kW Peak)

Electrical Specifications			Units
Frequency:	13.5-17.5	15.5-17.5	GHz
Insertion Loss	0.55	0.4	dB (max)
Isolation	20.0 @ S31 20.0 @ S23/S41	28.0 @ S31 20.0 @ S23/S41	dB (min)
VSWR	1.22	1.2	:1 (max)
Power Forward	250	250	Watts (max)
Power Peak	2.5	2.5	Kilo Watts (max)
Temperature Range	-31 to +55	-31 to +55	°C
Port 4 termination	2	2	Watt
Waveguide Flange	WR62 UG-1665/U	WR62 UG-1665/U	

Waveguide Isolator / Circulator, 13.5-17.5GHz Full or Part Bands
WR62UG-1665/U Flange, 4 ports, 2Watts, 250Watt Average, 2.5kW Peak

Bracket Not Shown



Configuration

