


# RADITEK

# LMDS ISO-ADAPTER

## RIA-27.5-28-WR28-SF

### LMDS waveguide, WR28 to SMA adapter

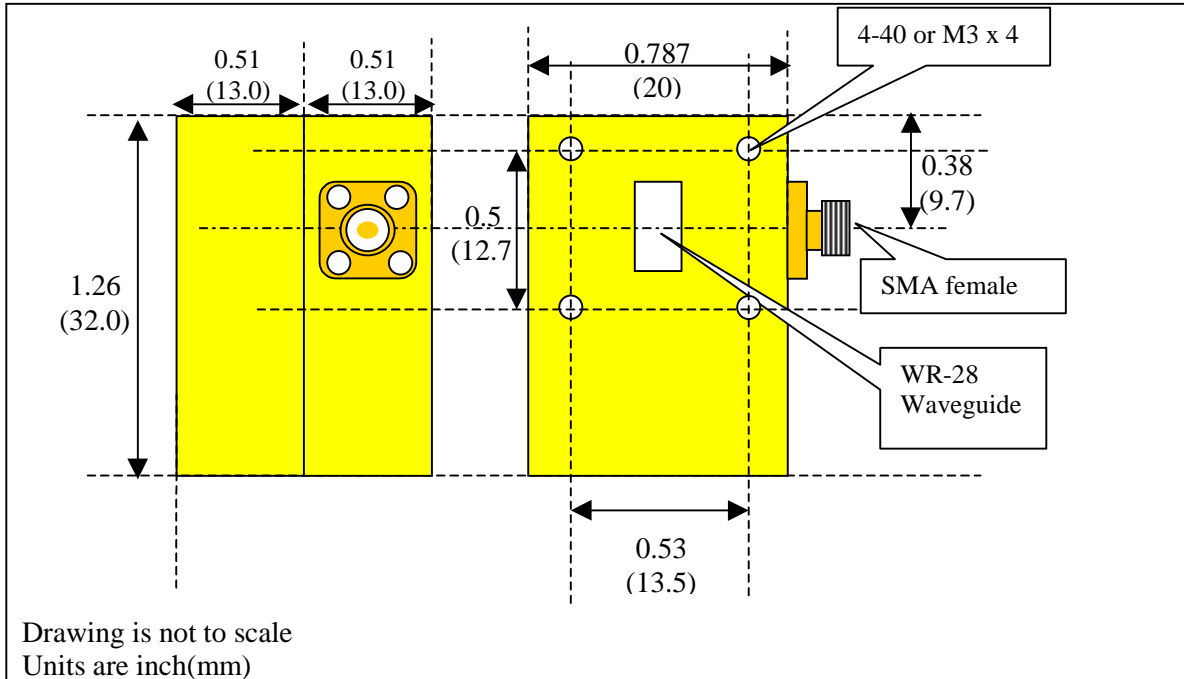

### Specifications:

LMDS Band example (other frequencies available)		
27.5-28 GHz	Order as "RIA-27.5-28-WR28-SF"	
Insertion loss	0.5	dB
Isolation	20	dB
VSWR (in and out)	1.25:1	
Forward power handling	10	Watts (max.)
Reverse power	2, 5 or 10	Watts
Operating temperature	-40 to 75	°C
Storage temperature	-40 to 85	°C

RIA-27.5-28-WR28-SF

6-4-99

Specifications may be subject to change