


ROHS Compliant

RADITEK INC.

ISOLATOR or CIRCULATOR, STRIPLINE DROP-IN 280-430 MHz, 1 WATT

code-b

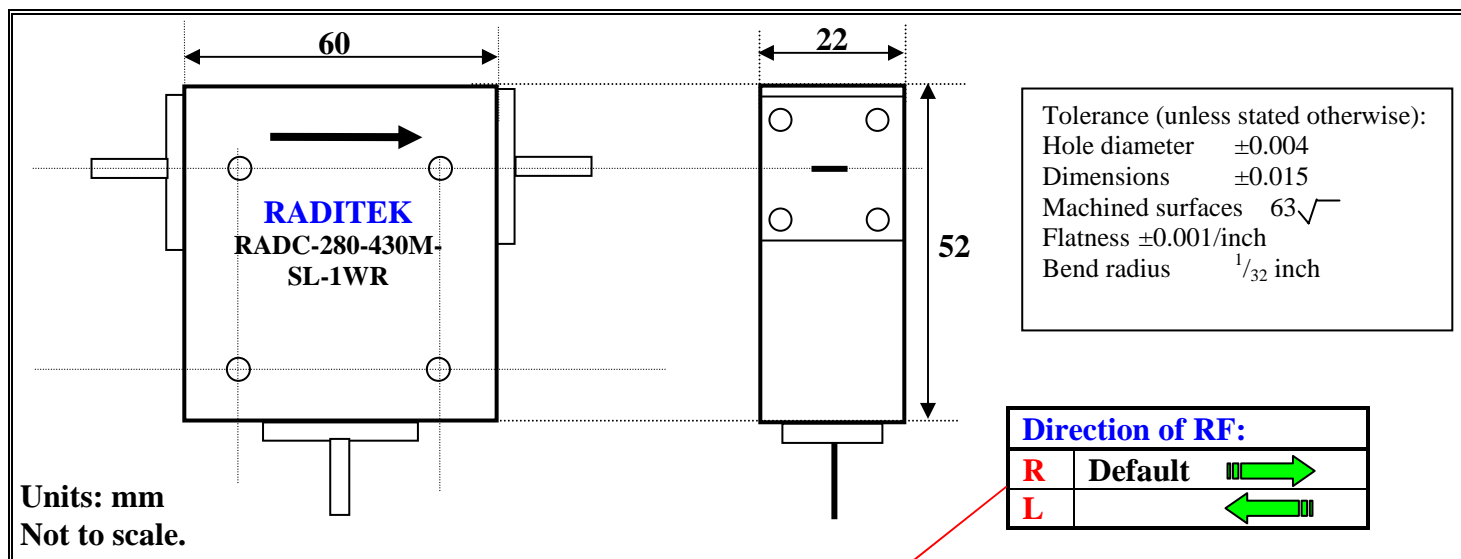

☛ Order Examples: RADC-280-430M-SL-1WR (Full)
I=ISOLATOR / C=CIRCULATOR

Specifications:				Units
Bandwidth	Full	15%	5%	MHz
Frequency	280-430	280-430	280-430	
Insertion loss	1.0	0.6	0.4	dB (maximum)
Isolation	15	20	25	dB (minimum)
VSWR	1.6:1	1.6:1	1.6:1	
Rated power (reverse)	1	1	1	Watts (average) {power in load}
Operating temperature	0 to +50	0 to +50	0 to +50	°C