


ISOLATOR or CIRCULATOR, STRIPLINE DROP-IN 370 TO 450 MHz, 10, 20 OR 60 WATTS

code-b

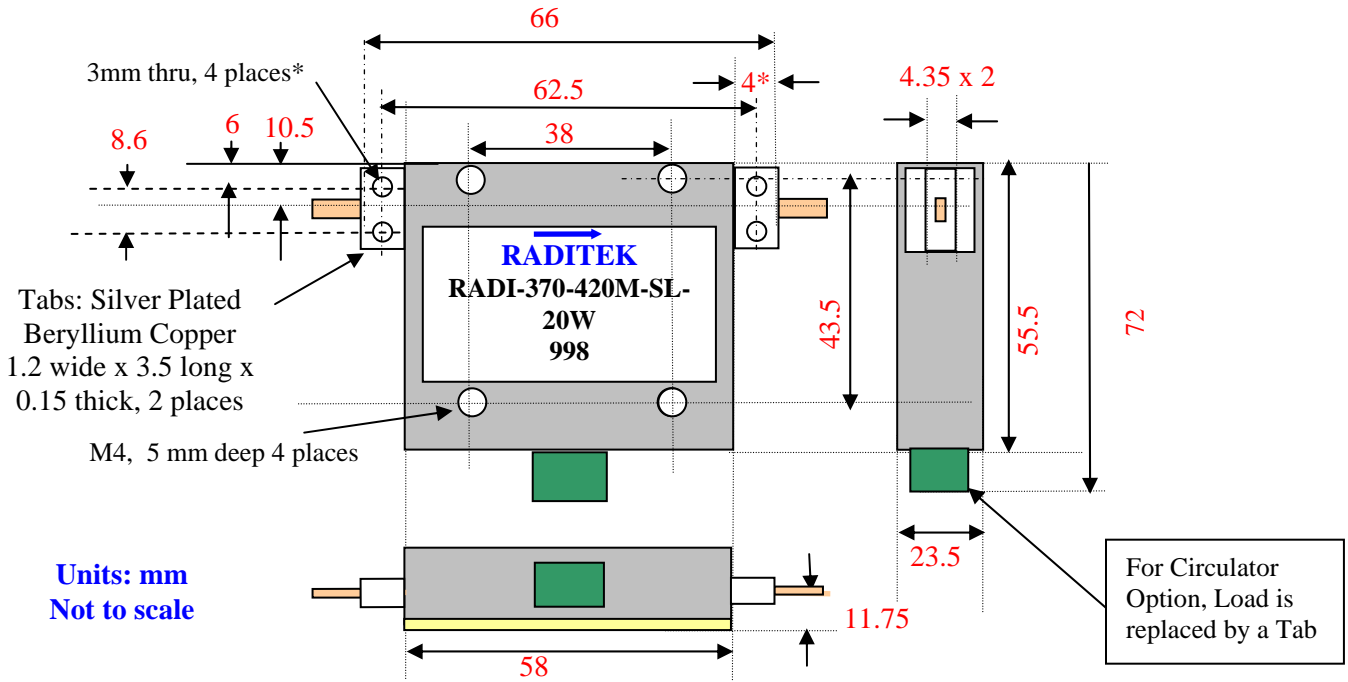

**Units: mm
Not to scale**

Direction of RF:	
R	Default
L	

Order Example: RADI-370-420M-SL-20WR
I=ISOLATOR / C=CIRCULATOR

Specifications				Units
Frequency	370-420	380-430	400-450	MHz
Insertion loss	0.5	0.7	0.4	dB max (0 to 80°C)
Isolation	18	18	20	dB min
VSWR	1.25:1.	1.3:1.	1.3:1.	dB min typical
Forward power	200	200	200	Watt
Reverse Power	20	10	60	Watt
Assumes Infinite Heatsink				
Operating temperature	-20 to +80	-20 to +80	-20 to +80	°C