



Wide Band, High Frequency Stripline, Drop in Isolators and Circulators

ISOLATOR

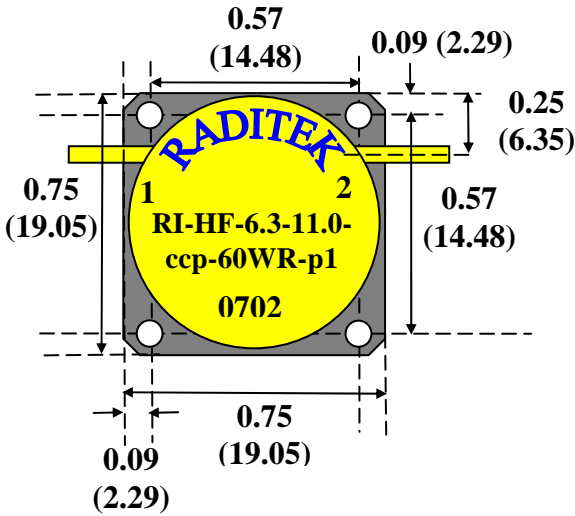


CIRCULATOR

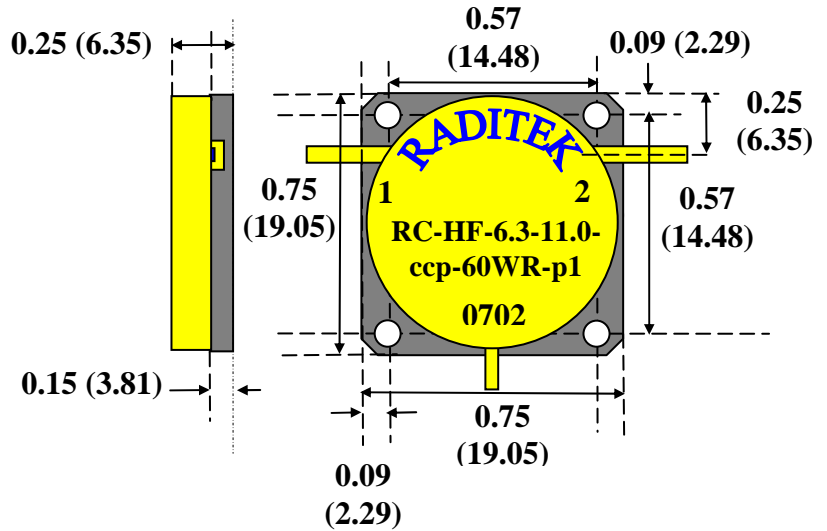

Direction of RF:	
R	Default
L	

Units: Inch (mm)
Not to scale

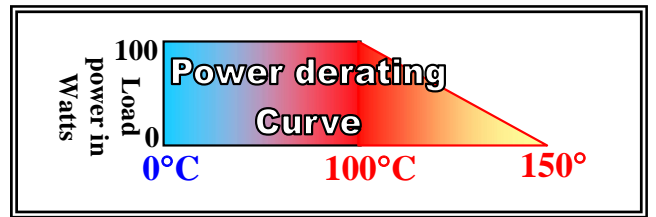

Order Examples: **RI-HF-F1-F2M-ccp-60WR-p1**
I=ISOLATOR / C=CIRCULATOR

Electrical Specifications			Units
Frequency:	6.3-11.0	5.0-15.0	GHz
Insertion Loss	0.60	1.20	dB (max)
Isolation	17	13	dB (min)
VSWR	1.35	1.60	:1 (max)
Return Loss		12.7	dB
Power Forward	60	30	Watts
Power Reverse	25	2	Watts
Operating Temperature	-30 to +65	-30 to +65	°C
TABS	0.025" W; 0.080" L; 0.005" thick		