


## ISOLATOR, STRIPLINE DROP-IN

code-b

275-286 MHz, 100 WATTS

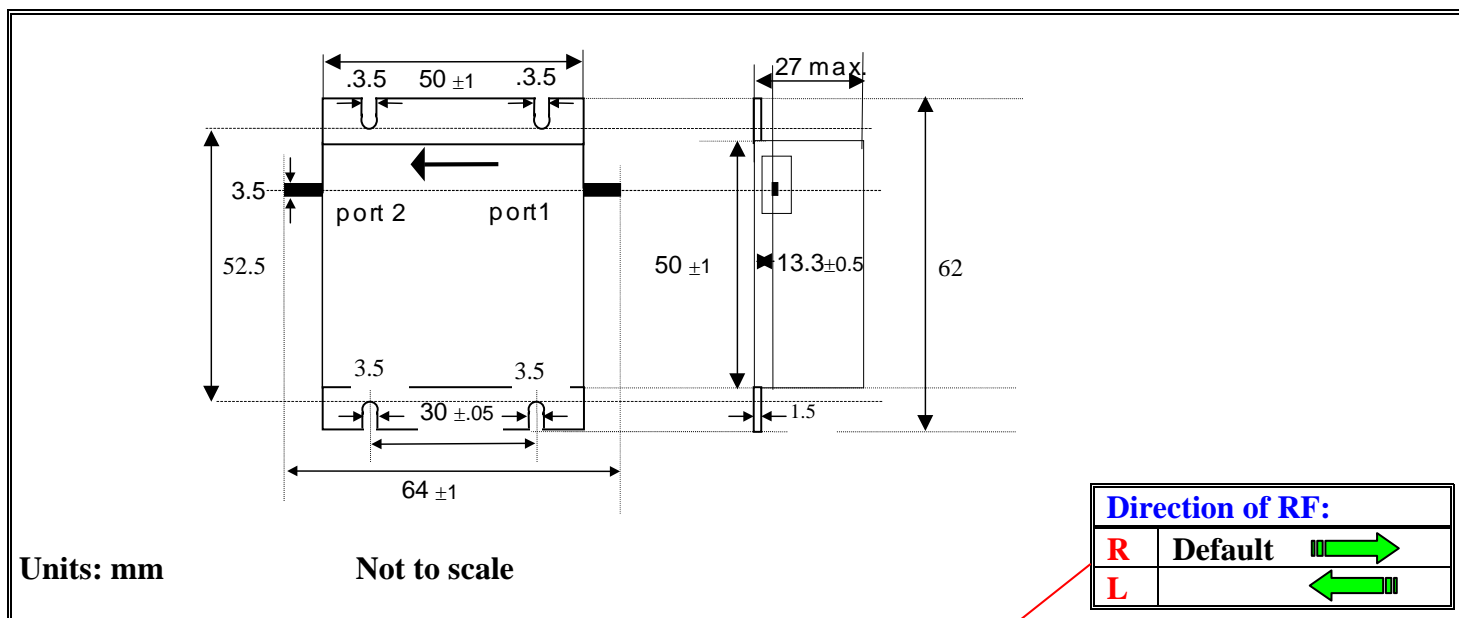

Order Examples: **RADI-275-286M-TT-100WR**

<b>Specifications:</b>		
Frequency	275 to 286	MHz
Isolation	20	dB (minimum)
Harmonics	<-70	dBc (maximum)
Insertion loss	0.7	dB (maximum)
Phase matching In 4 piece matched set.	within 10° maximum	
VSWR	1.25	:1 (maximum)
Forward Power	100	Watts (average)
Reverse Power	100	Watts (average)
Operating temperature	0 to 50	°C
Humidity	40 to 85	%

Marking: Model, Frequency, Serial number, mark Input=port 1, Output=port 2.