


2-Way Splitter-Combiner, 6.0-18.0GHz SMA Female Connectors, 2 Watt

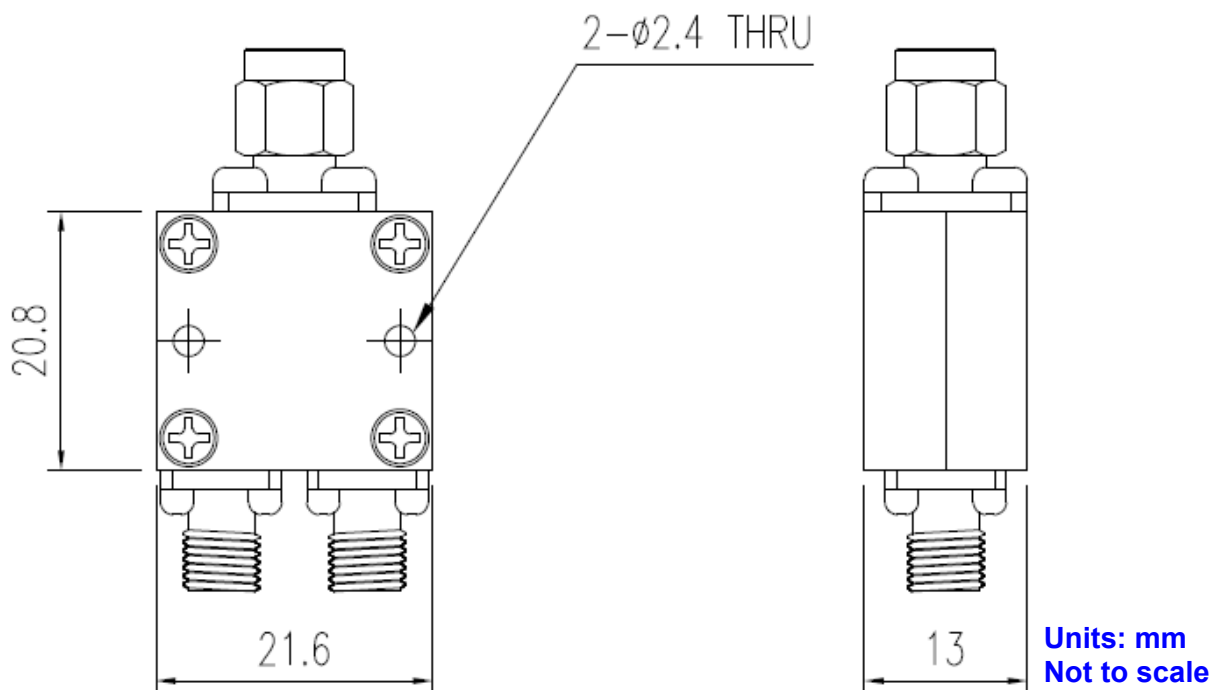

Order Examples: R2SC-6-18-Sm-Sf-2W-z4

Description: (2-Way Splitter Combiner, 6.0-18.0GHz, SMA Male to SMA Female Connectors, 2Watt, z4 model)

Specifications			Units
Frequency Range	6.0-18.0		GHz
Insertion Loss	1.1		dB max
Isolation	15		dB min
VSWR (Input/Output)	1.5		:1 max
Amplitude Unbalance	0.5		dB max
Phase Unbalance	6		° max
Power	2		Watt max Load VSWR should be less than 1.5:1
Impedance	50		Ω
Connectors	Input	SMA Male	
	Output	SMA Female	
Operating Temperature	-30 to +70		°C
Finish	Clear chemical film per MIL-C-5541, Class 3		