


2-Way Splitter-Combiner, 800-3000MHz SMA Male or TNC Male Connectors, 0.25Watts

code-z4

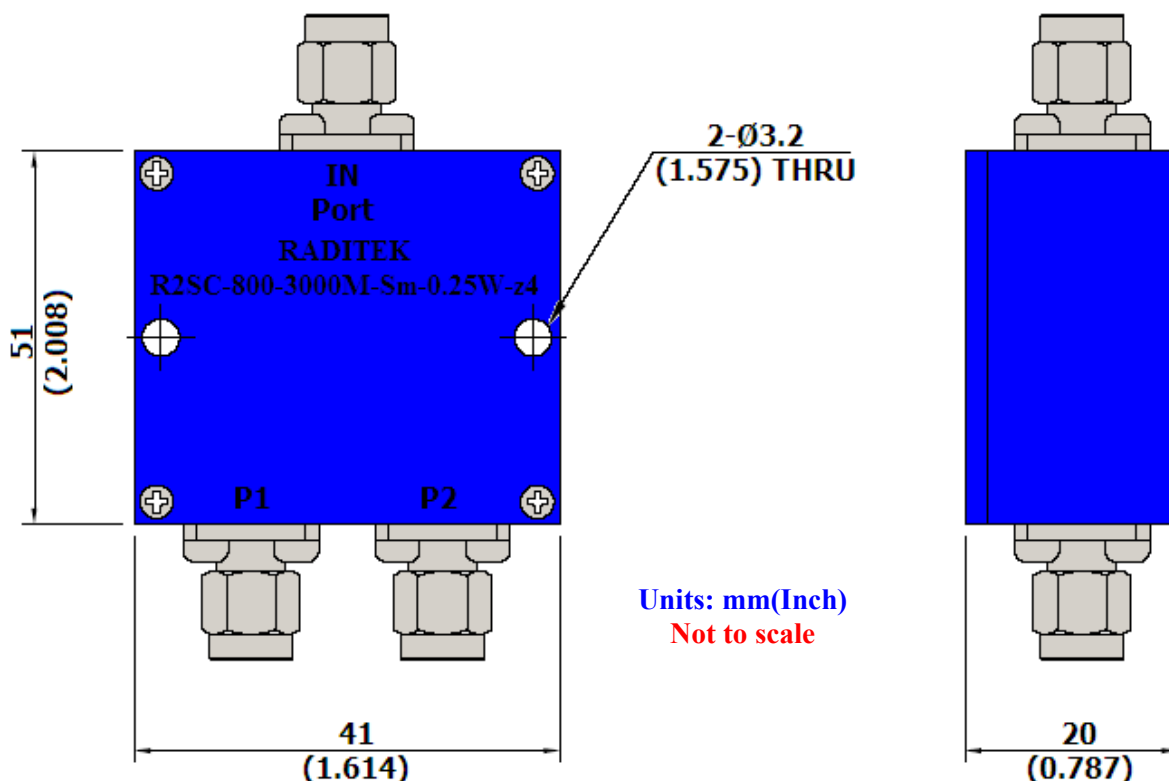

Order Examples: R2SC-800-3000M-Sm-0.25W-z4

Description: (2-Way Splitter Combiner, 800-3000MHz, SMA Female Connectors, 0.25 Watts)

Specifications		Units
Frequency:	800-3000	MHz
Insertion loss (include ideal loss)	4.0	dB (max)
Isolation	15.0	dB (max)
VSWR	1.5	:1 (max)
Amplitude unbalance	0.5	dB (max)
Phase unbalance	10	° (max)
Input Power	0.25	Watt (max)
Impedance	50	Ω
Connector	SMA Male or TNC Male	
Operating Temperature	-30 to 70	°C
Finish	Clear chemical film per MIL-C-5541, Class 3	