


RADITEK INC.

4-Way Splitter Combiner, 1025-1035 MHz SMA Female Connectors, 100 Watts (10kW Peak)

code-g

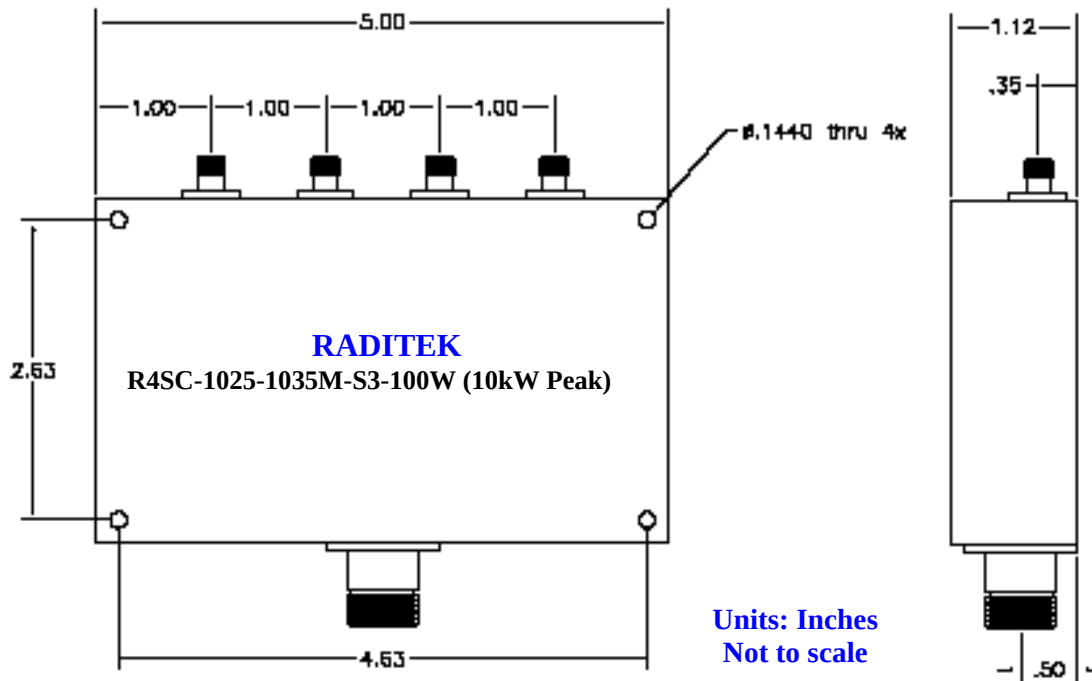

Specifications		Units
Frequency:	1025-1035	MHz
Insertion loss	(0.35) + 6	dB max (Theoretical) + device
Isolation	18	dB
VSWR	1.3	:1
Amplitude balance	±0.15	dB
Phase balance	5°	
Power (CW)	100	Watts
Power Peak	10	kilowatts 1%Duty Cycle
Operating Temperature	-10 to 55	°C
Storage Temperature	-50 to 125	°C

SMA or N Connector Options			
Port 1	Ports 2 -5		Delivery
female	male	1	special
male	female	2	special
female	female	3	standard
male	male	4	special

R4SC-1025-1035M-S3-100W(10kW Peak)-g Specifications may be subject to change

01/15/07

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com