

# RADITEK INC.

## R2SC-1-250M-PS06-1W-S

code-p4

### Features

- Frequency Range 1 – 250 MHz
- Low Cost
- Industry Standard SMT package
- Available in Tape-and -Reel
- 75 Ohms Characteristic Impedance

### Description

The R2SC-B102 is a 0° In-phase two way power splitter designed for applications that require small, low cost and highly reliable surface mount components. Applications may be found in broadband, wireless and other communications systems. S-Parameters are available on request.



### Specifications


Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1		250
Insertion Loss (dB)		0.5	1.0
Isolation (dB)	20	24	
Return Loss (dB)		23	17.7
Amplitude Balance (dB)		0.1	0.6
Phase Balance (Degrees)		0.5	1.5

### Absolute Maximum Ratings


Parameter	Maximum
RF Power	+33 dBm
Operating Temperature	-55 to +100 °C
Storage Temperature	-55 to +100 °C
Re-flow Temperature	+ 240 °C

Note: Typical values represent Mid-band performance @ 25°C.

### Schematic

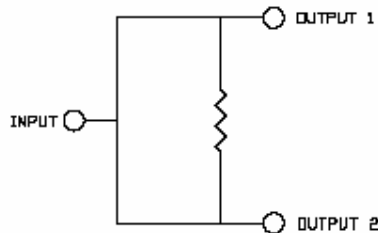


### Package – S06

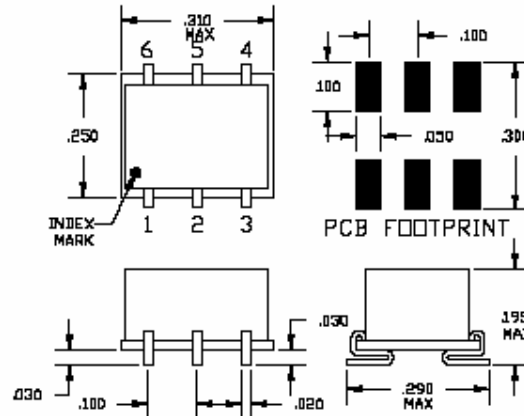


### Pin Functions

Function	Pin
INPUT	1
OUTPUT 1	3
OUTPUT 2	4
GROUND	2,5,6

Typical Test Data – Insertion Loss and Amplitude Balance

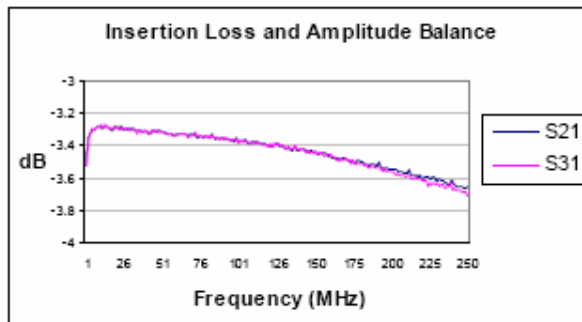

Typical Test Data – Return Loss and Output Isolation

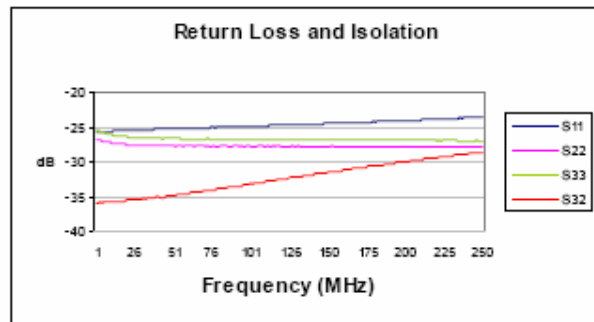

R2SC-1-250M-PS06-1W-S

Specifications may be subject to change

03/30/07

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: [www.raditek.com](http://www.raditek.com), E-mail: [sales@raditek.com](mailto:sales@raditek.com)